ASSURANCE CONSOLE

The complete guide

Everything it does, how to use it,
and everything it cannot do

Version 2.3.5 · 30 September 2026

A plain account of the whole app - both modules, every screen, every file it reads and writes - and, as carefully, of what it does **not** do. Where a limit exists it is said where you would meet it, and gathered again at the end.

Contents

Start here . . . 5

Who it is for . . . 5

What it promises, and what it does not . . . 5

How to read this guide . . . 6

Installing, updating and removing . . . 7

What it needs . . . 7

Installing . . . 7

Updating . . . 7

Starting and closing . . . 8

Where your data is kept . . . 8

Backing up . . . 10

Uninstalling . . . 10

Getting around . . . 11

The cover band . . . 11

Runs, checks and registers . . . 11

Starting a check . . . 12

The run page . . . 13

Colours and marks . . . 15

Opening an entry: the explanation . . . 15

Ticking entries off . . . 16

All entries, and downloads . . . 17

Messages you may see . . . 17

Keyboard, screen readers, small screens and printing . . . 17

Reading your files . . . 19

What each place accepts . . . 19

Spreadsheets . . . 19

PDFs . . . 19

Scans and photos . . . 20

Every file is kept . . . 20

GST purchases: GSTR-2B against your books . . . 22

What you give it . . . 22

How bills are matched . . . 23

What each result means . . . 24

The checks on every bill . . . 24

The credit working . . . 24

Your sales (optional) . . . 25

Downloads . . . 26
Everything the GST check cannot do . . . 27
Bank reconciliation . . . 28
What you give it . . . 28
How the statement is read . . . 28
How your bank book is read . . . 29
How lines are matched . . . 29
The reconciliation statement . . . 30
What else it finds (in the downloads) . . . 31
Downloads . . . 31
What the bank check cannot do . . . 31
A party's statement . . . 33
What you give it . . . 33
How the statements are read . . . 33
How entries are matched . . . 34
The bridge . . . 34
Against GSTR-2B (suppliers) . . . 35
The balance confirmation letter . . . 35
Downloads . . . 35
What the party check cannot do . . . 35
Exports: a register per exporter . . . 36
Registers . . . 36
The documents it reads . . . 36
Checking what was read . . . 38
Correcting what was read . . . 39
History . . . 40
The register . . . 41
Payment deadlines . . . 43
Money in . . . 44
eBRCs . . . 47
Refunds and drawback . . . 47
Your own yes or no . . . 49
The bank's EDPMS statement . . . 49
Everything it checks . . . 49
Drafts . . . 51
Downloads . . . 52
Picked up from your Downloads folder . . . 52
Documents . . . 53

The AI checker . . . 53
What Exports cannot do . . . 54
Settings . . . 55
Your business . . . 55
How closely entries must agree . . . 55
Exports . . . 56
AI checker . . . 56
The app . . . 56
Privacy and security . . . 57
Everything it can do . . . 58
Overall . . . 58
Reconciliation - GST . . . 58
Reconciliation - Bank . . . 58
Reconciliation - a party's statement . . . 58
Exports . . . 59
Everything it cannot do . . . 60
Overall . . . 60
Reading files . . . 60
Decisions and reports . . . 60
GST . . . 60
Bank . . . 61
A party's statement . . . 61
Exports . . . 61
When something goes wrong . . . 62
Messages and what to do . . . 62
Common questions . . . 63
Every number the app uses . . . 65
Glossary . . . 67

Start here

Assurance Console checks your books against the documents that are supposed to agree with them, and says, for every entry that does not agree, **why** in plain words. It also keeps a register of every export invoice and what is still missing from it. It runs entirely on your own computer: nothing is uploaded, nothing is filed, and it never logs in to any portal.

It has two parts, shown as the two tabs in the maroon band at the top of every page:

Part	What it is for	What you give it	What you get back
Reconciliation	Checking two sets of figures that should agree	GST: your Tally purchase register and the GSTR-2B from the GST portal (and, optionally, your sales register and filed GSTR-1). Bank: the bank statement and your Tally bank book. A party: their statement of account and your ledger for them	A verdict in one sentence, the working that ties the two sides, and every open entry with the reason it is open and what to do. Excel, PDF and CSV reports, letters to suppliers, a balance confirmation letter
Exports	Keeping every export invoice's papers, payment, refund and eBRC in one register per exporter	Shipping bills, bills of lading, invoices, GSTR-1, bank advices, DGFT and ICEGATE downloads, your bank's EDPMS statement, your own shipping bill register	A line per invoice showing what has arrived and what has not, deadlines worked out under the right rules, refunds and drawback not received with the ICEGATE code, and drafted letters and worksheets to fix what is wrong

Who it is for

It is written for the business owner as much as for the accountant. Every screen uses plain words ("Not in your books", "Paid, not yet through the bank") instead of accounting shorthand, and every open entry explains itself. An accountant gets the detail in the downloads: the input tax credit working, a bank reconciliation statement, a party bridge, sheet after sheet of schedules.

What it promises, and what it does not

- ✓ Everything stays on this computer. There is no account and no cloud, it works without an internet connection, and none of your data is ever sent anywhere. The one thing it does online is look for updates.
- ✓ Every entry left open says why: what it is, what was checked, the closest thing found on the other side and why it was not paired, what it means for you, and what to do.
- ✓ The working always adds up, or says by how much it does not and that a figure was probably read wrongly.
- ✓ Nothing is matched against your money silently in Exports: a payment is only counted against an invoice when a document names the invoice, or when you confirm it or choose the invoices yourself.
- ✓ Every file you give it is kept, named for what it is, and can be opened, saved, shared or found in its folder later.
- ✗ It does not file returns, submit anything to the GST portal, ICEGATE, DGFT or a bank, or log in to any of them. It reads the files you download from them.
- ✗ It does not replace your judgement. Letters and worksheets are drafts; figures read from a scan must be spot-checked; a suggested match must be confirmed by you.
- ✗ It is not an accounting package. It never changes your Tally data; it tells you what to change.
- ✗ It is for one person on one computer. There is no sharing between computers, no user accounts and no automatic backup.

How to read this guide

Each part explains one area in the order you would meet it, with pictures taken from the app running on its made-up sample company, **Kesari Textile Mills**. Throughout:

- ✓ a tick marks something the app **can** do,
- ✗ a cross marks something it **cannot** do, or does only partly.

> A box like this marks a limit worth stopping on - usually something that could mislead you if you did not know it.

Every limit is said where you would meet it, and they are all gathered again, with the capabilities, in the two chapters near the end: **Everything it can do** and **Everything it cannot do**. The last pages hold troubleshooting, a glossary, and a table of every number the app uses (tolerances, windows, caps and limits).

This guide describes **version 2.3.5**. Where the app's behaviour depends on a setting, the default is given and the setting is named.

Installing, updating and removing

What it needs

- **Windows, 64-bit.** The installer, the uninstaller, *Show in folder* and the start-up messages all use Windows features. There is no Mac or Linux version of the installed program.
- **No administrator rights.** It installs for you alone, into your own AppData folder.
- **WebView2**, the browser engine built into Windows. The app opens in a window of its own, drawn by WebView2, which comes with Windows 11 and is on nearly every Windows 10 computer. Without it the app opens in your default browser instead, at `http://127.0.0.1:8000` (a current Edge or Chrome is best; the *Share* button needs one of them).
- **About 270 MB** for the program, plus whatever your data grows to. The data folder keeps a full copy of every file you give the app.
- **No internet connection** to work. The text-recognition models ship inside the program. When the computer is online the app looks for updates (below) - the only thing it uses the internet for.

Installing

`Install.exe` is the only file you need (about 139 MB; a zipped copy is provided because email often blocks .exe attachments). Double-click it. A console window shows what it is doing:

- It installs to `%LOCALAPPDATA%\Programs\Assurance Console` - on most machines `C:\Users\<you>\AppData\Local\Programs\Assurance Console`.
- On a first install it asks **where your data should be kept** (see *Where your data is kept* below). Press Enter to keep it with the program, or type C to choose a folder in Windows' own folder picker.
- It shows a progress bar while it copies the files.
- It makes three shortcuts - **Assurance Console** on the desktop and in the Start menu, and **Uninstall Assurance Console** in the Start menu - and adds the app to *Settings* > *Apps* (Add/Remove Programs).
- It ends by showing where it installed, where your data is, and how to remove it, then asks *Start it now? [Y/n]*.

If saved work from an earlier install is found - you uninstalled but kept your data - it says so and picks it up again, without asking about the folder.

✗ There is no rollback on a first install that fails part-way (a full disk, for example); run it again once there is space.

Updating

By itself, when you are online. A little after the app starts, and every six hours while it stays open, it asks its release page on GitHub whether there is a newer version. When there is, it downloads it in the background, checks it (see *Privacy*), and shows **Update ready** at the top of the window. Most updates are the app's own code alone, a few MB; only one that brings a new Python or new libraries is the whole program again. *Settings* > *The app* then says "*Version 2.3.5 is ready to install (the app's own code, 2.4 MB)*", with what is new; press **Restart and update**. The app closes, the installer runs in a console window of its own - the same steps as below - and the app opens again on the new version. Nothing is installed until you press that button.

Settings > *The app* also shows the version you have, when it last looked, and **Check now**. Untick **Check for updates when this computer is online** to stop the checks altogether.

By hand. Run a newer `Install.exe`. It sees the copy already installed and updates it in place, with no questions:

- It says when the old copy was installed and **where your data is**, and that your saved runs and export registers stay exactly as they are.

- If the app is open, it closes it (only the copy in the install folder - a copy started from anywhere else is left alone), and opens it again when it finishes.
- The old program is moved aside, the new one copied in, and the old one deleted. If anything stops the copy part-way (a file held open by an antivirus scan, a full disk), the new files are removed and **the old version is put back**, so it still works.
- Your data folder and the note of where it is are never touched.

✓ Updating keeps your data, your settings, your chosen data folder, and every kept file.

✓ An update the app fetches must carry the publisher's signature and match its fingerprint, or it is thrown away - and it is always newer than the version you have.

✗ Versions before 2.2.0 cannot update themselves: install 2.2.0 by hand once, and later versions arrive by themselves.

✗ Updates come only from the app's GitHub release page. A computer that cannot reach GitHub (some office networks block it) gets them only by hand.

✗ The installer does not compare versions: running an older `Install.exe` by hand would replace a newer program. Keep the newest installer.

> If the data folder you chose cannot be found while updating (a drive that is not connected), the installer says so and offers to choose another; pressing Enter leaves the choice as it was, and the app will say it cannot reach the folder until the drive is back.

Starting and closing

Start it from the desktop or Start-menu shortcut. It opens in a window of its own, with its own button on the taskbar; behind it runs a small server on your computer, at `http://127.0.0.1:8000` (or the next free port up to 8011 if that one is busy). Opening it again while it is open brings its window to the front rather than starting a second copy.

When it starts it reopens the run you had open last. About five seconds after starting it quietly loads the text-recognition engine in the background, so the first scan you add does not wait for it.

Closing the window closes the app. Everything is saved as you go, so there is nothing to save first. **Settings > Close the app** does the same, after asking "*Close the app now? Everything you have done is already saved.*"

✓ Everything is saved as you go; there is no Save button.


✓ In the window, right-click copy and paste, Ctrl+F to find and Ctrl+P to print work as in a browser. A link that opens a file - a kept PDF, say - opens it in your browser.

✗ Without WebView2 the app opens in your browser, as versions before 2.2.0 always did, and there **closing the tab does not stop it**: use Settings > Close the app.

Where your data is kept

Everything you do - every run, export register, decision and setting, and every file you give the app - lives in one **data folder**. By default that is the `data` folder inside the install folder. You can choose another:

- **At the first install**, type C at the question and pick a folder. If the folder you pick already has other things in it, the app makes a folder called *Assurance Console data* inside it and uses that, so its files are never mixed with yours - and erasing the data later can never take anything else with it.
- **Later, in Settings** - under *The app*, **Where your data is kept** shows the folder and how much it holds, with **Show the folder** (opens it in File Explorer) and **Move it to another folder...**. Moving asks you to pick a folder, copies everything there, checks the copy (the number of files and the bytes must match) and only then removes the old copy. The app carries on from the new folder straight away; no restart.
- **Every update** keeps the folder you chose, and says where it is.
- **Uninstalling** asks about that folder (see below).

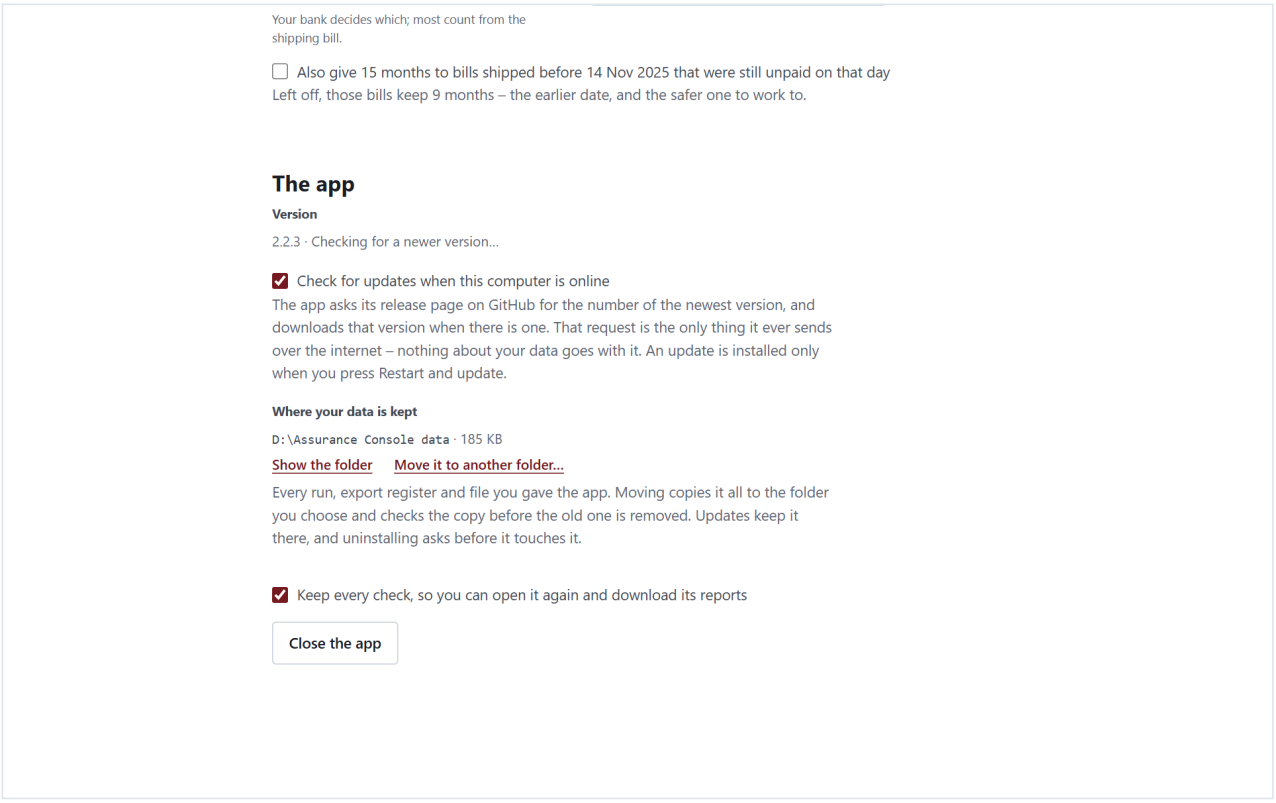

Settings, The app: the version and the update check, where the data is kept (Show the folder, Move it to another folder...), the switch that keeps every check, and Close the app.

The choice is written as one line in a file called `data-location.txt` beside the program. The installer, the app and the uninstaller all read it.

> If the data folder cannot be reached when the app starts - most often a USB or network drive that is not connected - the app does **not** start with an empty database. It says which folder it cannot reach and stops. Connect the drive and start again, or run `Install.exe` again to choose another folder.

What the folder holds:

Item	What it is
`reconcile.db`	The database: runs, checks, decisions, settings, the supplier contact book, and what was read from every document
`reconcile.db-wal`, `reconcile.db-shm`	Working files while the app is open; folded into the database when it closes
`documents\`	Every file you gave the app, in a folder per run or register and a folder per kind inside it
`log.txt`	A record of unexpected errors, for troubleshooting
`reconcile.pre-v2.db`	Only on machines upgraded from a very early version: a copy of the old database made before it was converted

Backing up

✗ There is no automatic backup, and no backup or restore button.

✓ Your whole working life in the app is the data folder. To back it up, close the app (Settings > Close the app), then copy the folder somewhere safe. To restore, put the copy back (or move the app to it in Settings).

Reports you download go to your Downloads folder (in a browser, to its download folder). They are copies: deleting a run, or uninstalling, does not delete them.

Uninstalling

Use *Settings* > *Apps* in Windows, or **Uninstall Assurance Console** in the Start menu. A console window:

- shows where your data is and how big it is, and says it is kept by default: "*Type YES to erase them, or press Enter to keep*". Only YES erases.
- closes the program if it is running, removes the shortcuts and the Add/Remove Programs entry, and deletes the program.
- If you **keep** the data, it stays where it is, with the note of where it is, so **installing again picks it up**.
- If you **erase** it, only what the app wrote into the data folder is removed (the database, its working files, `documents`, the log), and then the folder itself if that leaves it empty. Anything else you had put in that folder stays.
- Either way it removes the window's cache and any downloaded update, which are kept in `%LOCALAPPDATA%\Assurance Console`.

✗ The uninstaller closes every program named "Assurance Console.exe", not only the installed one.

✗ It leaves a small copy of itself in your temporary folder (Windows will not let a running program delete itself).

✗ Files in use can occasionally stop it removing everything; it lists them and asks you to restart and delete the folder by hand.

Getting around

The cover band

The maroon band at the top of every page holds, from left to right:


- **ASSURANCE CONSOLE** - goes back to the start page (and clears any files you had chosen but not checked).
- **Reconciliation** and **Exports** - the two parts. Each remembers where you left it.
- **The open run's name**, in a bordered button (hidden when nothing is open). Click it for *Switch to another run* - the ten most recent - and *See every run*. In Exports it reads *Switch to another register*.
- **Update ready**, with a gold dot, only when a newer version has been downloaded and is waiting (it opens Settings, where **Restart and update** installs it).
- **Settings**, and the gold button: **Start a new check** in Reconciliation (*New check* on a narrow screen), **Add documents** in Exports.

Runs, checks and registers

A **run** is one client and one period. It holds up to three **checks**: GST, Bank, and a party's statement. **Each check starts a run of its own** unless you add it to an existing run - this keeps one client's GST from ending up beside another client's bank statement. To add a check to a run, use **Add another check to this run** in the run's left margin, or **Add a check to this run** in the list of runs. The start page then says "*This check will be added to …*", with the link *Keep it as a separate run instead*.

A run is named from the client and the period the documents cover (for example *Kesari Textile Mills · 1 Apr 2025 – 31 Mar 2026*). A check added later fills in only what is blank; it never overwrites what is there.

In Exports, a **register** plays the same part: one exporter's documents, kept as long as you keep adding to them.

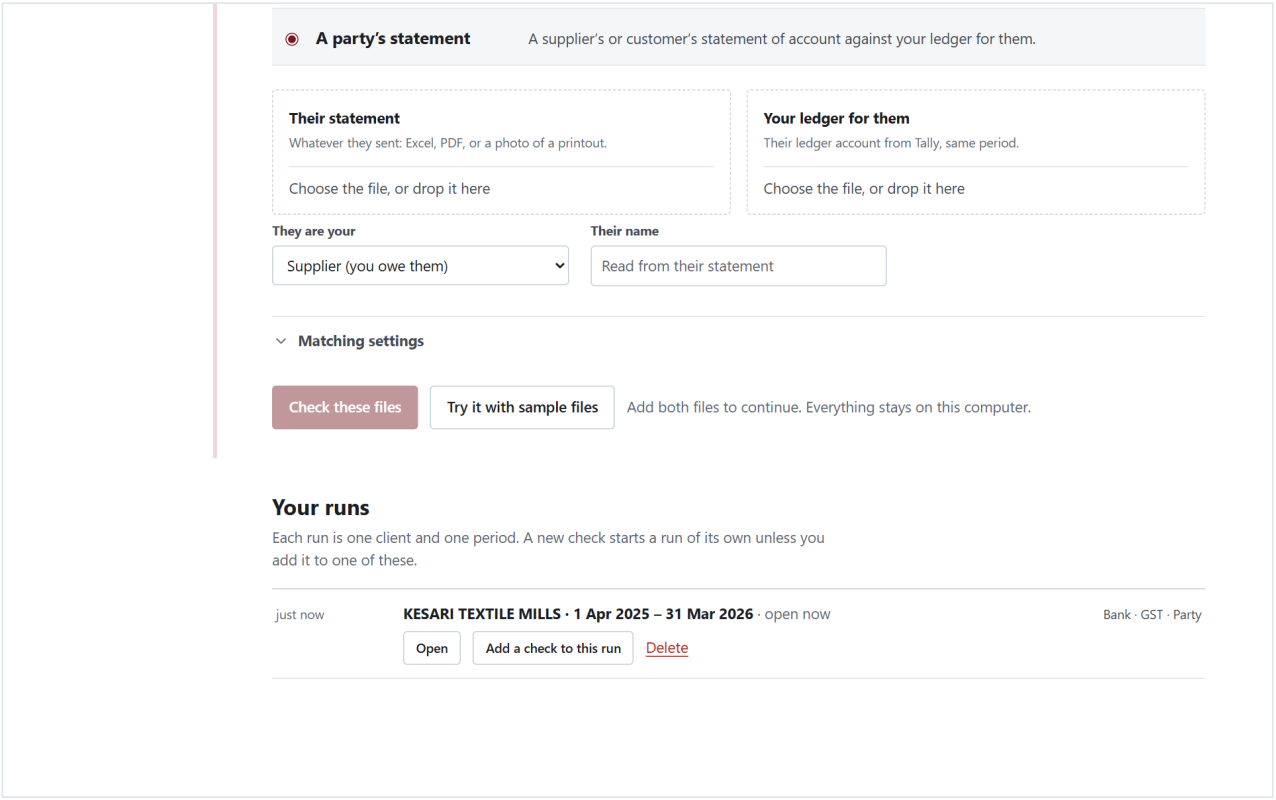

Your runs on the start page: when each was last used, its name, what it holds, and Open, Add a check to this run, Delete.

✓ The start page lists your runs, newest first: *Open*, *Add a check to this run*, *Delete* (with a warning - it cannot be undone). Eight are shown, then *Show all*.

✗ A run shows only the **newest** check of each kind. Add a second bank check to the same run and the first is still stored, but no screen opens it again. Two bank accounts belong in two runs.


✗ Renaming, archiving and pinning runs, deleting a single check, and comparing two checks exist in the program's internal interface only - there are no buttons for them.

✗ At most 200 runs and registers are listed.

Starting a check


Start a new check asks one question: *What do you want to check?*

- **GST purchases** - your purchase bills against what your suppliers filed on the GST portal (GSTR-2B).
- **Bank** - your bank book against the statement the bank sent.
- **A party's statement** - a supplier's or customer's statement of account against your ledger for them.

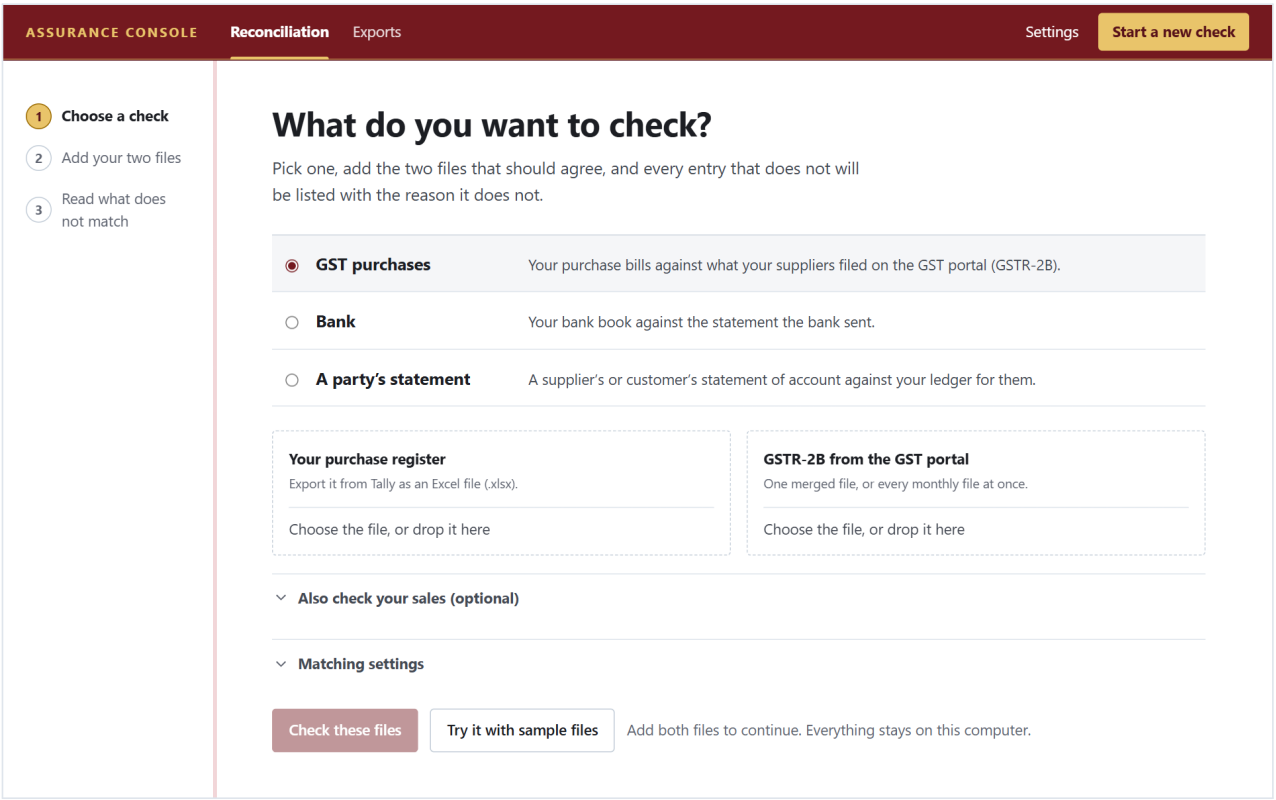

The start page: one question, three choices, and your runs below.

Pick one and add the two files. Each file goes in its own dashed box: click it, or drop the file on it. A filled box turns solid green and shows the file's name. Under **Matching settings** you can change how closely entries must agree for this check (the defaults come from Settings). **Check these files** stays greyed out until both files are in; **Try it with sample files** runs the made-up sample instead.

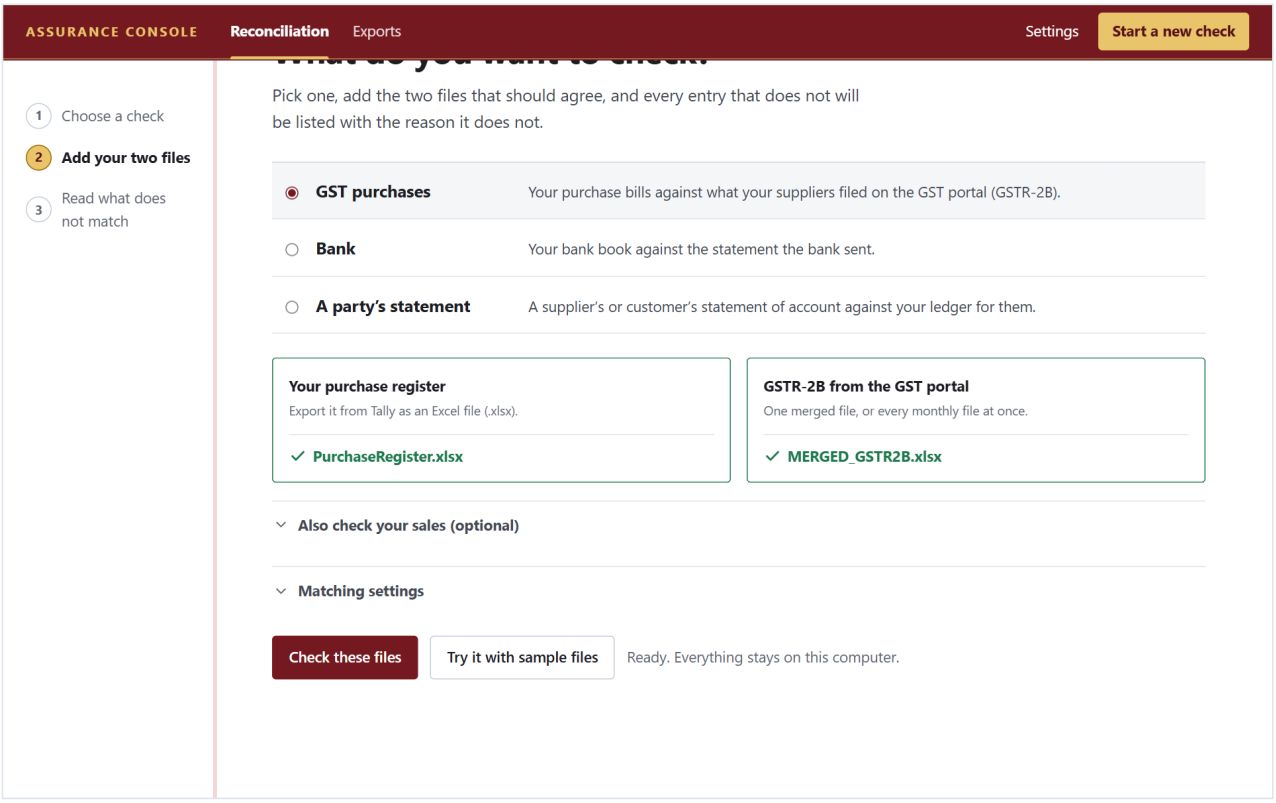

Both files added: the boxes turn green and Check these files is ready.


While a check runs, a card shows three stages - *Reading your files*, *Matching the entries*, *Writing down why each open entry is open*. The stages move on a timer to show it is working; they are not a measure of progress.

The run page

A finished check opens as one long page with a margin on the left.

The margin (*In this run*) lists the checks in the run, each with how many entries are still open, and *Add another check to this run*. Under *On this page* it lists the sections - Summary, Needs a look (with each kind of problem and its count - click one to show only those), Sales (if loaded), All entries, Downloads and files - and the colour key.

The summary opens with one sentence saying whether the two sides agree, then a line of counts - so many settled, so many need a look, so many serious - and the key figures. For bank and party checks it then shows the **working**: your balance, each difference on its own line in plain words, and their balance, closing with "*It adds up. Every rupee between the two balances is on a line above.*" Each line of the working that has entries behind it is a link that shows only those entries.

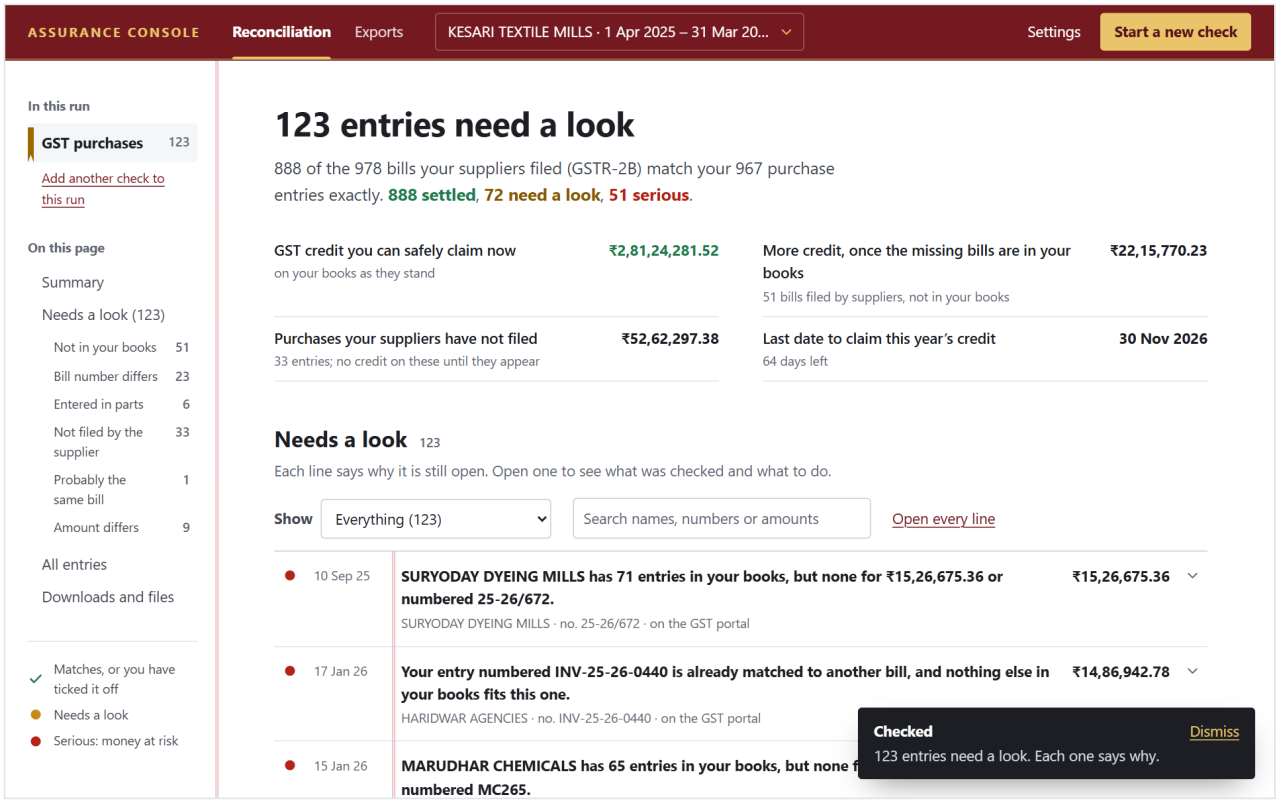


A GST check: the verdict, the counts, and the four figures that matter.

Needs a look lists every open entry as one line: the date, the reason in bold, who and which document, and the amount (with *off by ₹…* when two amounts differ). Serious lines come first, then the largest amounts. Above the list:

- **Show** - every entry, or one kind;
- a search box - it matches names, numbers, GSTINs, the reason, and amounts typed as plain digits (type 142800, not 1,42,800);
- **Hide what I have ticked off** (once something is ticked) and **Open every line**.

150 lines are shown at a time, then *Show more*.

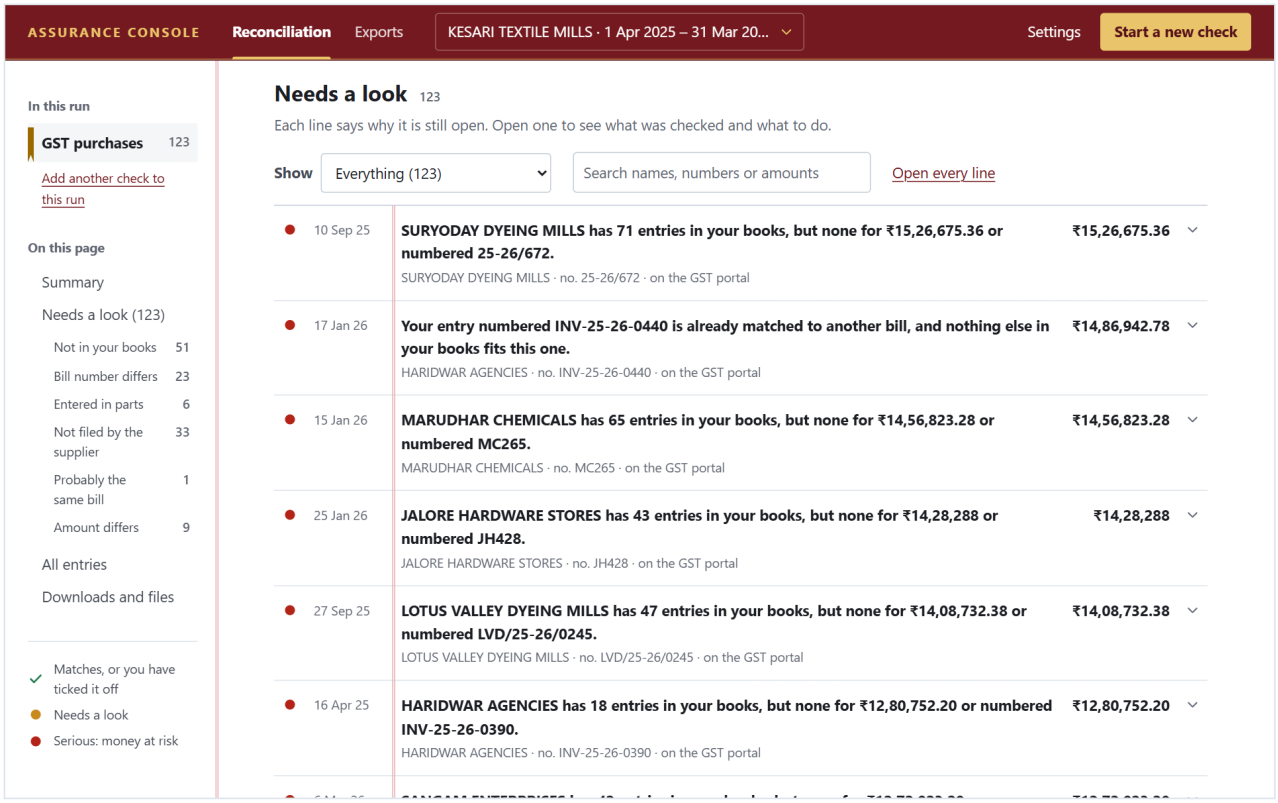

Needs a look: each line says why it is still open.

Colours and marks


Mark	Meaning
Green tick	Matches, or you have ticked it off
Amber dot	Needs a look
Red dot	Serious: money at risk
Grey ring (Exports only)	Not due yet, or a document is still to come

What counts as serious: in GST, a bill the supplier filed that is not in your books, or credit about to lapse under Section 16(4); in Bank, money that left or arrived with no entry in your books, and cheques more than three months old; for a party, disputed amounts and anything open for more than 180 days; in Exports, whatever puts a refund or a deadline at risk.

Opening an entry: the explanation

Click a line to open it. The explanation has up to six parts, each only when it has something to say:

- **What this is** - the document in plain words.
- **What was checked** - the questions the matcher asked, answered against every entry on the other side: is there one with this number? this amount? from this supplier? on a nearby date? already paired with something else?
- **Closest match found** - the nearest thing on the other side, and exactly why it was not taken.
- **What it means for you** - the effect in rupees: credit you cannot claim yet, a deadline, a charge not in your books.
- **What to do** - one concrete step.
- **Also note** - anything else about the document (reverse charge, place of supply, a date outside the year...).

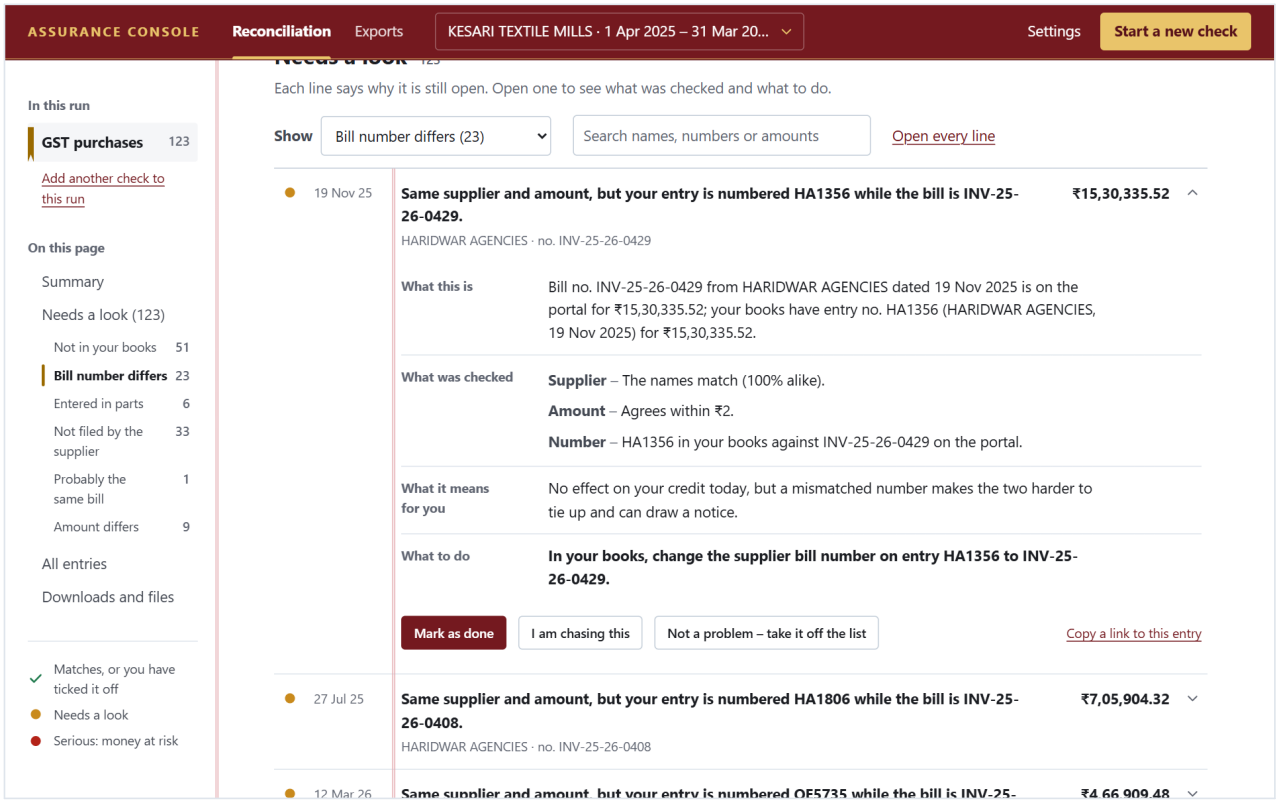


An open entry explains itself: what it is, what was checked, the closest match, what it means and what to do.

Ticking entries off

Under every open explanation:

- **Mark as done** - you have dealt with it.
- **I am chasing this** - it stays on the list, marked as being followed up.
- **Not a problem – take it off the list** - treated as settled from now on.
- On a GST *Probably the same bill* entry, **Yes, it is the same bill** - the pair counts as matched the next time the run is checked.
- **Copy a link to this entry** - an address that opens the run on this entry, already open.

A ticked entry is struck through, drops to the bottom, and stops counting as open. The line says what you decided and when, with **Undo**.

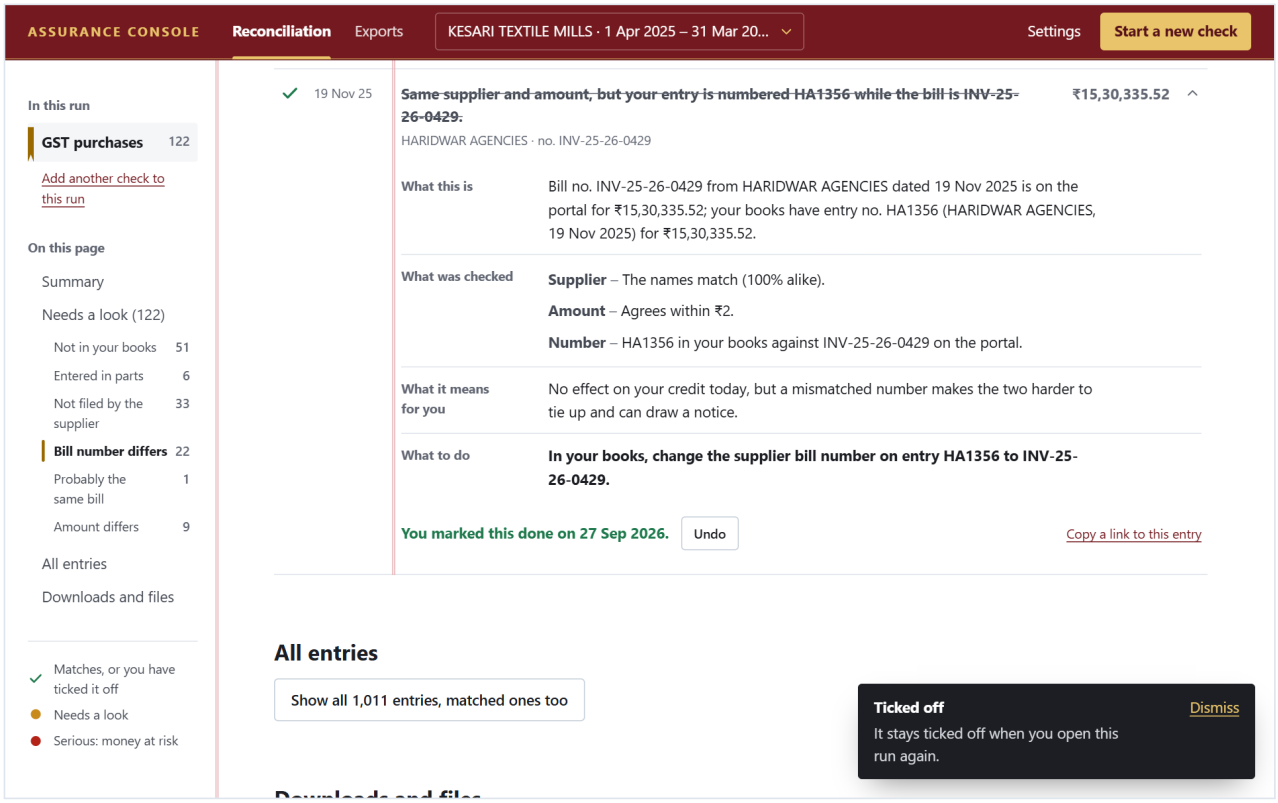

A ticked entry: struck through, moved to the end, with what you decided and an Undo.

- ✓ Decisions are kept with the run, and come back when you open it again or add another check to it.
- ✗ A decision belongs to its run. A new, separate run of the same client starts with none.
- ✗ You cannot type a note on a decision, or tick many entries at once.
- ✗ Ticking changes the page, not the reports: ticked entries still appear in the Excel, PDF and CSV downloads, in the supplier letters and in the drafted export papers, and still count in the credit and summary figures.
- ✗ A decision is tied to the document's number and amount. If either changes in a later file, the old decision no longer applies to it.
- ✗ *Copy a link* only works on this computer, while the app is running on the same port.

All entries, and downloads

All entries (at the foot of each check) lists everything, matched pairs too, 100 per page, with its own search; click an open row to jump to its explanation. **Downloads and files** holds the reports for the check and the files it was made from (see each part for what each report contains, and *Reading your files* for the kept files).

Messages you may see

Small messages appear at the bottom right and fade (serious ones stay until you dismiss them): *Checked - N entries need a look. Each one says why.*; *Saved to your downloads*; *That file could not be made*; *Those files could not be checked*, with the reason. The chapter **When something goes wrong** lists the common ones and what to do.

Keyboard, screen readers, small screens and printing

- ✓ Every control is a real button or link with words on it; everything can be reached with the keyboard; a *Skip to the page* link comes first; the working card and messages are announced to screen readers; animation stops if you ask Windows to reduce motion.
- ✓ In a narrow window the margin folds into a row of short tabs and each entry reflows onto two lines; tables scroll sideways.

✓ Printing leaves out the band, the margin, the buttons and the downloads, and keeps entries whole on the page.

✗ There are no keyboard shortcuts.

✗ Only what is on screen prints: 150 entries at a time, and explanations only for lines you have opened.

✗ There is one light theme; no dark mode.

✗ Phones and other computers cannot reach the app - it listens only on this computer.

Reading your files

Everything the app knows comes from files you give it. This chapter says which files each place accepts, how they are read, how scans and photos are read, and what is kept afterwards.

What each place accepts

Where	Accepts	Refuses
GST: purchase register, GSTR-2B, sales register, GSTR-1	Excel `.xlsx` only	`.xls` (the picker lists it, but it is refused: save it as .xlsx), `.csv`, `.json`, PDF, pictures
Bank: the statement	`.xlsx`, `.csv` / `.txt` / `.tsv`, PDF (with text or scanned), pictures: `.png`, `.jpg`, `.jpeg`, `.tif`, `.tiff`, `.bmp`, `.webp`	old `.xls`, `.gif`, `.heic`, Word files
Bank: your bank book	The same as the statement	The same
Party: their statement and your ledger	The same as the bank statement	The same
Exports	PDF, pictures, `.xlsx`, `.csv`, the GSTR-1 `.json`	old `.xls` (save as .xlsx), anything else

A file is recognised by what is inside it, not only by its name: a PDF renamed `.xlsx` is still read as a PDF.

Spreadsheets

- Every sheet is read, formulas giving their last saved values. Column order never matters: columns are found by their headings.
- The heading row is searched for near the top: within the first 25 rows (GSTR-2B), 30 (Tally registers, bank and party files) or 20 (GSTR-1). The heading must sit on one row, although a GSTR-2B two-row heading is understood.
- For a bank statement, the sheet with the most rows is used. For a party's workbook with a sheet per ledger, the sheet whose ledger name matches the party on their statement is used.
- CSV files are read in UTF-8, Windows or Latin encodings, with the separator (comma, semicolon, tab or bar) detected.

✗ At most 20,000 rows per sheet are read for bank, party and export files; any more are dropped without a warning.

✗ Only the first 60 columns of a GSTR-2B sheet are read.

✗ There is no way to tell the app which column is which when it cannot find a heading - the file must carry recognisable headings.

PDFs

Each page is looked at on its own. A page with at least 90 characters of real text is read as text, which is exact and fast. A page with less - a scan - is turned into a picture at 200 dots per inch and read by text recognition (below). One PDF can mix both.

On a text page the app uses a ruled table if it finds one; otherwise it cuts the page into columns from where the words sit under the headings, placing each word by its centre so right-aligned figures land in the right column. The pages of one statement are stacked into one table, with repeated headings dropped.

✗ Only the **first 40 pages** of a PDF are read. Pages after the 40th are ignored, and nothing says so.

✗ Password-protected PDFs cannot be opened.

✗ On a text page only the first ruled table is used.

Scans and photos

Pictures, and PDF pages without text, are read by a text-recognition model that ships inside the program (RapidOCR, PP-OCRv3). It works offline, on the computer's processor, using between two and six processor threads.

How fast. On a current laptop a scanned page takes about 1 to 1.5 seconds; a photo of a page about a second. The engine loads in the background when the app starts, so the first scan does not wait for it. Version 2.1.2 made recognition about a fifth faster than before (words are read three at a time, which against the text layers of 24 real PDF pages was both quicker and slightly more accurate than the library's default), and it no longer re-reads, by recognition, PDFs whose text layer is perfectly good.

How it rebuilds a table. Recognised words are grouped into lines by their height on the page, and into columns by where their left edges cluster; the pages of one scanned statement share one set of columns so figures do not shift sideways from page to page. A small screenshot (under 1,500 pixels) is enlarged up to three times first, because at screen size letters run together.


How you know it read correctly. Every recognised word carries a confidence; the page and document confidence are averages, and the source line under a check says, for example, "*the statement was read by recognition at 93% confidence*". Every reading by recognition adds the note "*Some pages were read by recognising the image, so figures should be spot-checked against the original.*" For bank statements the running balance is checked row by row; for interest statements every product, total and the interest itself are recomputed. A figure misread shows up as a residual the working cannot explain.

- ✓ Reads scanned PDFs, phone photos and screenshots of printed statements, bills of lading and invoices, with no internet and nothing to install.
- ✓ Very large pictures are handled safely: words are found on a copy no larger than 4,000 pixels (then read from the full picture), a PDF page is never drawn larger than 5,000 pixels, and memory is handed back after every page - one poster-sized scan can no longer take gigabytes.
- ✗ It reads **printed** text. Handwriting is not read.
- ✗ Pages must be **upright**. Sideways or upside-down photos are not turned; turn them before adding them. (The part that guesses whether a line is upside down is switched off on purpose - it once read "6,063.00" as "00'E90'9".)
- ✗ It is tuned for English letters and digits. Hindi or other scripts are not read.
- ✗ A multi-page TIFF gives only its first page. Several photos of one statement cannot be combined into one statement.
- ✗ Only the statement's (or their statement's) reading is reported on screen. If your bank book or ledger was itself a scan, that is not flagged.

> Recognition is careful, not perfect. Always spot-check figures read from a scan against the original, especially when the app reports a residual or a broken running balance.

Every file is kept

Every file you give the app is kept in the data folder, in a folder per run or register, and a folder per kind inside it. Reconciliation files keep their own names, with what they are in front (*Tally - PurchaseRegister.xlsx*, *Bank statement - …*, *Their statement - …*). Export documents are named for what was read from them - *SB 3183667 of 20-Aug-2024 (INNSA1) - KE-24-25-088.pdf* rather than ICEGATE's download number - and filed under *Shipping bills*, *Bills of lading*, *Invoices*, *GSTR-1*, *Bank advices*, *DGFT*, *ICEGATE*, *Your register* or *Not recognised*.

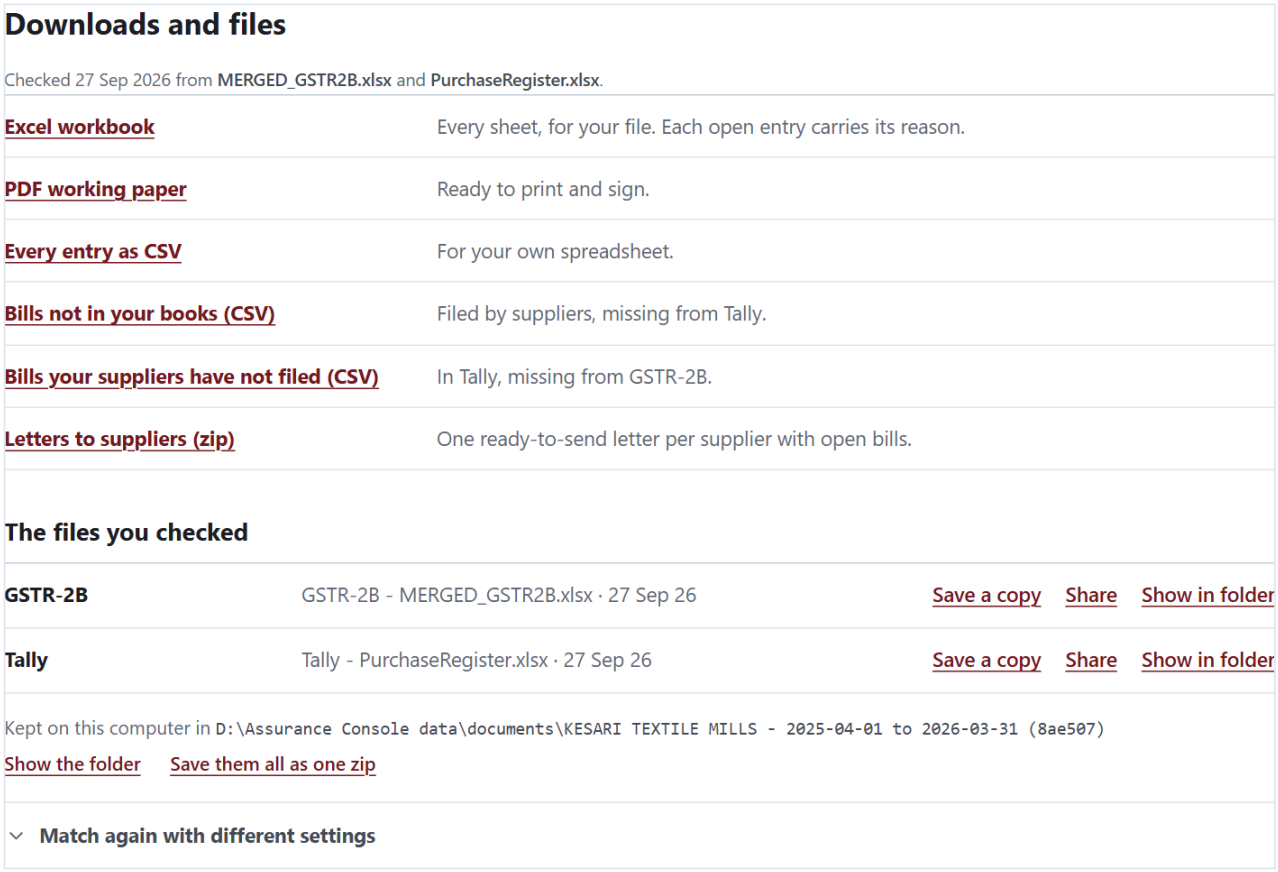

The files a check was made from, with Save a copy, Share and Show in folder, and the folder they are kept in.

Each kept file has:

- **Open** - for PDFs and pictures, which open in your browser;
- **Save a copy** - under its kept name, to your downloads;
- **Share** - Windows' share window (mail, nearby sharing, and apps that accept files), for the kinds of file a browser can share: PDFs and pictures. Anything else is saved as a copy instead, and the app says so;
- **Show in folder** - File Explorer, with the file picked out, ready to drag into an email or a chat.

Under each list: *Kept on this computer in …* with **Show the folder** and **Save them all as one zip**. In Exports, each invoice also has **Save them as one zip** for its own papers (shipping bill, bill of lading, invoice and bank advice).

✓ The same file added twice to the same run or register is kept once.

✓ Deleting a run or register deletes its folder; removing one export document deletes its kept copy.

✗ A check made with *Keep every check* switched off keeps nothing.

✗ Checks made before version 2.1.1 kept no files; they say "*Not kept: this check was made before the app kept its files.*"

✗ Excel files cannot go through the share window - that is the browser's rule, not the app's.

GST purchases: GSTR-2B against your books

The GST check compares the bills your suppliers reported on the GST portal (your **GSTR-2B**) with the purchases in your **Tally purchase register**, and works out how much input tax credit you can safely claim. If you also add your **sales register** and the **GSTR-1** you filed, it checks your sales too and prepares a GSTR-3B working.

What you give it

Box	What to add	Notes
Your purchase register	The Purchase Register exported from Tally as Excel (.xlsx)	One file. A Day Book also works, but see the limits below
GSTR-2B from the GST portal	The GSTR-2B Excel download	One merged file, or every monthly file at once - any number; they are combined
Your sales register (optional)	Tally's Sales Register as Excel	One file
The GSTR-1 you filed (optional)	The GSTR-1 Excel from the portal	One or more files

Under **Matching settings**: the **financial year** (*Read from the file* unless you choose), **Allow a difference of (₹)** (default ₹2, for rounding), **your GSTIN** (sets your home state for the place-of-supply check, and prints on reports) and **business name** (otherwise taken from the Tally file).

How the GSTR-2B is read

- Sheets are found by their names: B2B, B2BA (amendments), CDNR and CDNRA (credit and debit notes), ISD and ISDA, IMPG, IMPGSEZ and IMPS (imports). A sheet called Sheet1 is read as B2B. Other sheets are ignored.
- Columns are found by their headings, in any order, including the portal's two-row headings ("Tax Amount / Integrated Tax"): GSTIN, trade or legal name, invoice number, date, value, place of supply, reverse charge, applicable % of tax, taxable value, IGST, CGST, SGST/UTGST, cess, filing date, period, ITC availability, reason, original number and date for amendments, and more.
- Rows without a correctly formed GSTIN are dropped (this is how repeated headings and padding are removed; imports need only a bill-of-entry number). Rows with nothing in them are dropped.
- Credit notes are made negative. A credit-note amendment is treated the same way.
- Several GSTR-2B files are combined; a row appearing identically in two downloads (same section, GSTIN, number, value and period) is kept once.

How the Tally register is read

- The sheet named *Purchase Register* is used (then *Purchase*, *Day Book*), otherwise the first sheet.
- The heading row must have Particulars, Vch No., or Vch Type; the lines above it give your company name and the period ("1-Apr-25 to 31-Mar-26").
- Particulars is taken as the supplier. The amount is Credit (or Debit, or Value) for purchases.
- Reading stops at the first *Total* or *Grand Total* line. Opening and closing balance lines, and lines starting "By " or "To ", are skipped.
- A voucher of type exactly "Purchase" is flagged as possibly not a GST bill; a voucher with no number is flagged too.

Which financial year

The year is the one most of your purchase vouchers fall in. If you choose a different year, the run notes it: "*The register is dated 2025-26, but the run was set to 2024-25. GSTR-2B documents dated outside 2024-25 are still matched, and marked as outside the year.*" The year sets the Section 16(4) deadline (30 November after the year

ends) and the months of the trend. If no date can be read at all, 2025-26 is assumed.

✗ Documents dated outside the year are matched and counted like any other; they are only marked. Your Tally vouchers outside the year are not marked.

✗ The year comes from the purchase register alone, and one Section 16(4) deadline applies to every document in the run.

How bills are matched

The matcher works in passes. Each pass only sees what the earlier ones left, and a Tally voucher is never used twice.

Pass	Result	What must agree
0	Matched (by you)	You said "Yes, it is the same bill" in an earlier check of this run, and both sides are still there
1	**Matched**	The same bill number (after normalising: separators and each group's leading zeros removed, so 25-26/0376 = 25-26/376) and the amount within ₹2. The name need not agree - if it is less than half alike, the pair is still matched but marked *ledger name is different*
2	**Amount differs**	The same bill number and names at least 40% alike, the closest amount winning. There is no limit on the size of the difference. Up to ₹10 is called a rounding difference
3	**Bill number differs**	The amount within ₹2 and names at least half alike (dates are not checked). Numbers that end in the same 3 or 4 digits count strongly
4	**Probably the same bill**	An amount within 0.1% (or ₹2), dates within 45 days, names at least 35% alike, and an overall score of at least 0.72. Never counted as matched until you confirm it
5	**Entered in parts**	One GSTR-2B bill equal (within ₹2) to 2 or 3 Tally vouchers from the same supplier within 45 days
6	One-sided	Whatever is left: **Not in your books** (filed by the supplier, not in Tally) or **Not filed by the supplier** (in Tally, not in GSTR-2B)

Suppliers are compared by name, after taking away M/s, brackets and endings such as Pvt Ltd, Traders, Enterprises or Industries.

✓ Amendments replace what they amend: an amendment that names its original bill takes that bill out of matching and out of every total, shown as *Replaced by an amendment*.

✓ Dates more than a month apart on a matched pair are marked.

✗ **Tally's GSTIN column is never used for matching** - a supplier is recognised by the name of its ledger. Two suppliers with similar ledger names can be confused; one supplier under two very different names will not be connected.

✗ Pass 1 pairs any bill with the same number and amount, even from a different supplier; the only sign is a note in the Excel and CSV (*ledger name is different*).

✗ Pass 2 pairs bills with the same number and similar names whatever the difference - two different bills that happen to share a number can be paired.

✗ *Entered in parts* finds one bill booked as up to 3 vouchers (from the 14 largest candidates) - not several bills booked as one voucher.

What each result means

Result	On screen as	Colour
Matched	Settled	Green tick
In GSTR-2B only	**Not in your books**	Always red: credit is waiting
In Tally only	**Not filed by the supplier**	Amber
Value mismatch	**Amount differs**	Amber
Invoice no. mismatch	**Bill number differs**	Amber
Probable match	**Probably the same bill**	Amber
Split booking	**Entered in parts**	Amber
Superseded	*Replaced by an amendment*	Settled

Any open entry whose credit is close to lapsing under Section 16(4) (60 days or fewer) or has lapsed is also red.

The checks on every bill

As each GSTR-2B row is read it is checked, and anything found appears under **Also note** in the entry and in the downloads:

- **Place of supply**: CGST/SGST charged when the place of supply is another state (needs your GSTIN) - that tax is not creditable to you.
- **Reverse charge**: the tax is yours to pay in cash, then claim.
- **Credit the portal blocks**: ITC availability *No*, with the portal's reason explained where known (four common reasons are explained in plain words).
- **Partly creditable**: an applicable percentage below 100.
- **The tax rate**: the implied rate (tax ÷ taxable value) is compared with the GST slabs (0 to 28%). A rate between slabs is noted as a mixed-rate bill; a rate below 0 or above 28.5% as impossible.
- **The tax split**: IGST together with CGST/SGST on one bill, or CGST and SGST that are not equal halves.
- **The value**: invoice value that differs from taxable value plus tax by more than ₹2 or 0.5%.
- **Duplicates**: the same GSTIN, number and value more than once - claiming both would double the credit.
- **Section 16(4)**: bills not in your books whose credit lapses on 30 November after the year.

✗ The app does **not** decide for itself which credits are blocked under Section 17(5) - only what the portal marks as unavailable is treated as blocked.

✗ Cess is counted in the implied rate, so bills with cess can look mixed or impossible; a genuine rate above 28.5% (for example 40%) is reported as impossible.

✗ The place-of-supply check compares state names as text, and only runs when your GSTIN is known.

The credit working

The summary shows four figures: **GST credit you can safely claim now** (on your books as they stand), **More credit, once the missing bills are in your books**, **Purchases your suppliers have not filed**, and, when credit is at stake, **Last date to claim this year's credit** with the days left.

The full working - in the Excel and the PDF, not on screen - goes:

Line	How it is worked out
Credit shown in GSTR-2B	IGST + CGST + SGST + cess across every section; a bill replaced by an amendment counts once, as amended

Line	How it is worked out
Less: portal marks ITC unavailable	The tax on blocked rows
Less: partially creditable rows	The part that is not creditable
Less: place of supply outside your state	What is left of those rows' tax
Credit allowed by law	The ceiling - you cannot claim above this
Less: invoices not yet booked in Tally	The credit allowed on bills not in your books - Section 16(2)(a): the bill must be in your books
Less: reverse-charge credit	The credit allowed on booked reverse-charge bills - claim only after paying the tax in cash
Safe to claim this period	What you can defend today

- ✓ Each bill's credit comes off once, at the first line above that applies to it: a reverse-charge bill not yet in Tally comes off as not booked, a blocked reverse-charge bill as blocked, and a partly creditable bill from another state by the part not creditable and then by the rest.
- ✓ **More credit, once the missing bills are in your books** leaves out reverse-charge bills: once booked, their tax still has to be paid before the credit is safe.
- ✗ Reverse-charge tax is deducted whether or not you have paid it; credit from before the year is not deducted.
- ✗ Ticking entries off does not change these figures; confirming a *same bill* does, at the next check.

The GSTR-3B working

When both sales files are loaded, the Excel and PDF add a GSTR-3B working: the output tax from your GSTR-1, set off head by head against the **credit allowed by law** (the ceiling above, split into IGST, CGST, SGST and cess, and printed by head under the credit working in the PDF), surplus IGST credit applied to CGST and SGST in equal halves, cess only against cess, giving the cash payable and the credit carried forward. Without the sales files the output side is left empty, not guessed, and the PDF gives the credit allowed by law and how much of it is safe to claim.


- ✗ The set-off uses the credit allowed by law, not the smaller figure that is safe to claim: it still includes credit on bills not yet in your books and reverse-charge credit not yet paid for. The note printed under the working says so.
- ✗ If your GSTR-1 workbook has an HSN summary sheet, its rows are added to the output tax.

Your sales (optional)

With a sales register and a GSTR-1, a second list appears: *Sales: your GSTR-1 against your books*, matched on the invoice number only - **Matched**, **Amount differs**, **Reported, not in your books**, **In your books, not reported**.

- ✗ Sales are matched on the exact invoice number only: no name, near-number, probable or split matching. B2CS summary rows (which have no invoice number) are always unmatched.
- ✗ Decisions do not affect sales matching (ticks show, but the next check matches afresh). There is no sales CSV, sales entries are not in *All entries*, and their explanations are not in the downloads.
- ✗ The sample button loads the purchase side only; the sample sales files are in the SampleData folder if you want to add them yourself.

Downloads

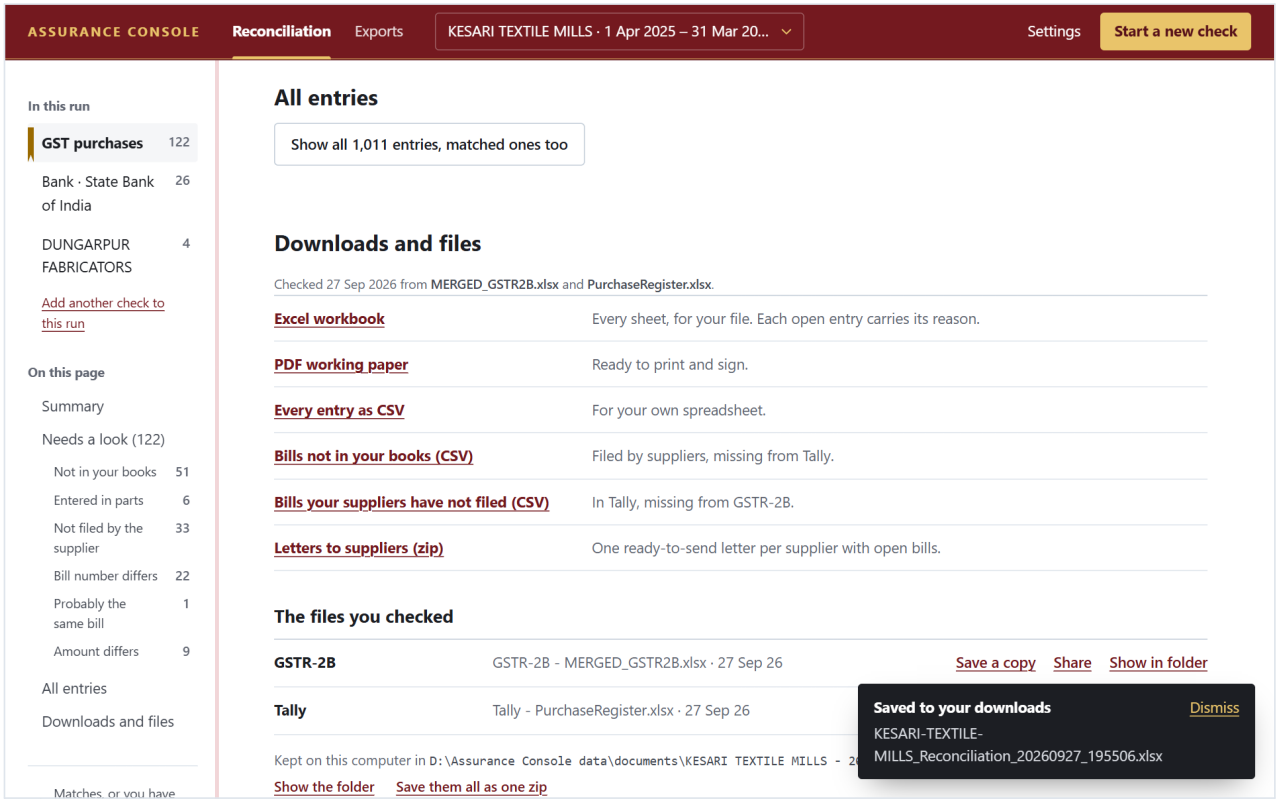

Downloads and files: the reports for this check, the files it was made from, and Match again.

- **Excel workbook** - 17 to 27 sheets, depending on what there is to show. It opens on a Contents sheet (business, GSTIN, period, a health score with a verdict from *Filing-ready* to *Material gaps*, and a link to every sheet), then: Summary; Reconciliation (every row, both sides, 18 columns); 2B not in Tally; Tally not in 2B; Value mismatch; Invoice no mismatch; Party-wise; Why each is open (the reason and what to do for every open entry); Probable matches; Split bookings; Superseded rows; ITC working; ITC blocked reasons; GSTR-3B working; Action checklist; Data quality; Possible duplicates; Ageing; Rate analysis; Monthly trend; Supplier scorecard (each supplier graded A to E on unmatched and mismatched share, credit at risk and filing delay); Credit concentration; Section 16(4) watch; Follow-up list; and, with sales, Sales summary and Sales reconciliation.
- **PDF working paper** - ready to print and sign: a one-paragraph summary, the control totals, the status table, the credit working and what to do next; then the largest open items, ageing and data findings; then the monthly table, tax slabs, the riskiest suppliers, the Section 16(4) position, the GSTR-3B working, sales, and *How the matching was done* with the settings actually used.
- **Every entry as CSV**, **Bills not in your books (CSV)**, **Bills your suppliers have not filed (CSV)** - 36 columns each, UTF-8 for Excel.
- **Letters to suppliers (zip)** - one ready-to-send letter per supplier with bills not in your books or not agreeing, and one per supplier whose purchases have not reached GSTR-2B: the documents concerned, their total and tax, and a request to send or file them. Plus a list of all letters and all letters in one file. The letters use the contact person and email from the supplier book when known.

Match again with different settings

At the foot of a saved GST check: change **Allow a difference of (₹)** and **Look this many days either side**, and press **Match again**. It uses the records already read - no re-uploading - applies the run's decisions and today's date, and saves the result as a new check in the run.

✗ Match again exists only for GST. Bank and party checks have to be added again to be re-matched.

✗ Letters include suppliers you have ticked off; probable matches and split bookings are not included in letters.

✗ Ages and days-to-deadline are fixed on the day of the check; Match again refreshes them.

Everything the GST check cannot do

✗ Read `.xls`, CSV, PDF, scans or the GSTR-1 JSON for GST (JSON is read by Exports).

✗ Use Tally's GSTIN column, filter out non-purchase vouchers in a Day Book (payments and journals would come in as purchases), read Tally's narration or tax columns, or understand "Dr"/"Cr" written beside amounts.

✗ Detect Section 17(5) blocked credit, file anything, or talk to the GST portal.

✗ Show the credit working, GSTR-3B working, checklist, data findings, ageing, rates, trend or supplier grades on screen - they are in the Excel and the PDF.

✗ Tell you, on screen, about sheets or rows it skipped while reading - they are recorded but not shown.


Bank reconciliation

The bank check compares the statement your bank sent with the bank book in your books (Tally), names every difference, and proves that the two balances reconcile - a bank reconciliation statement that adds up to the rupee.

What you give it

- **The bank statement** - Excel, CSV or PDF from the bank; a scan or a photo works too.
- **Your bank book** - the bank ledger from Tally for the same period.

Under **Matching settings**: **Allow a difference of (₹)** (default ₹1), **Same transaction if within (days)** (default 7), **Timing difference up to (days)** (default 45), and **Read the statement as a scan, even if it is a PDF with text** - useful when a PDF's text layer is garbled.

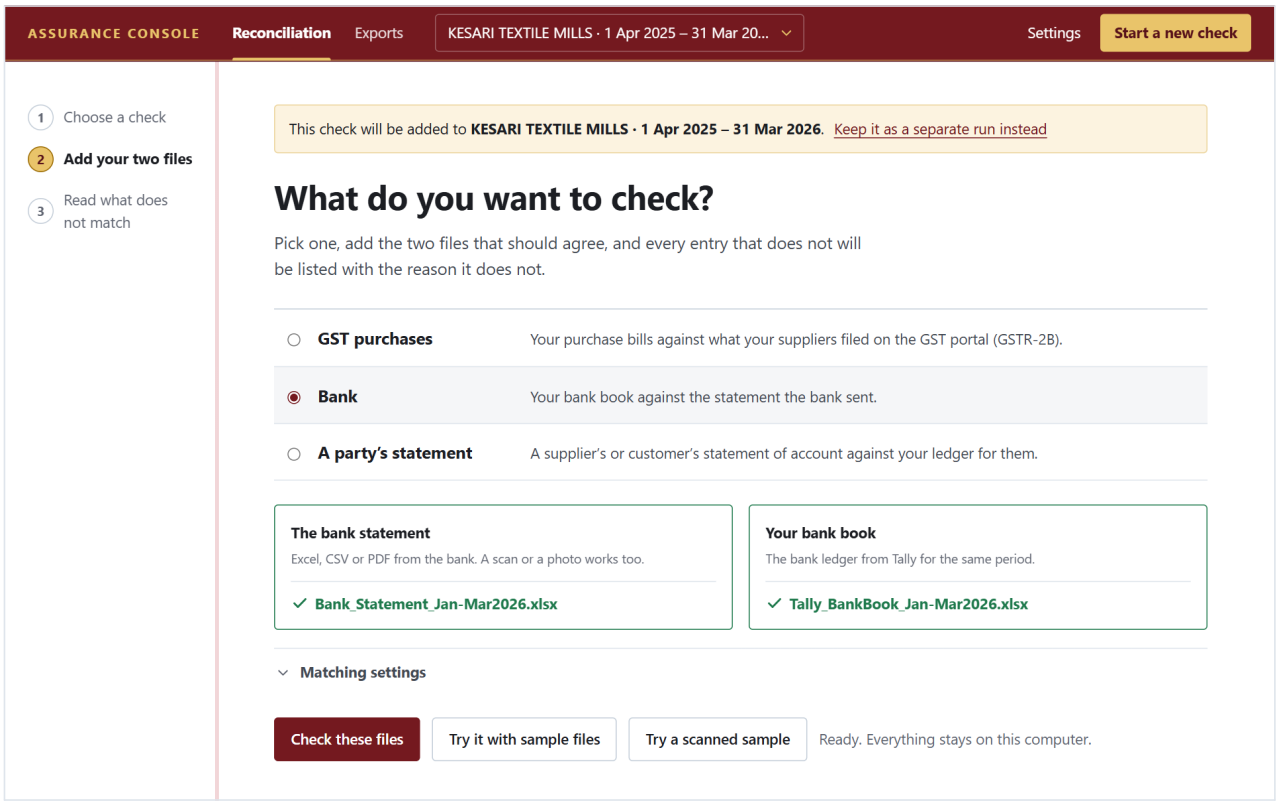

Adding a bank check to the same run: the statement and the bank book.

How the statement is read

The heading row is found within the first 30 rows by scoring each row for a date, a narration, withdrawal and deposit columns (or one amount column with a Dr/Cr flag), a balance and a reference. Headings are recognised in the many ways banks write them: *Txn Date*, *Value Dt*, *Narration*, *Particulars*, *Chq./Ref.No.*, *UTR*, *Withdrawal Amt.*, *Deposit Amt.*, *Debit*, *Credit*, *Closing Balance*, *Dr/Cr* and so on.

For each line:

- The **date** - day first (dd/mm/yyyy and some twenty other ways of writing a date, and Excel dates). A date glued to the front of the narration by a scan is split off.
- The **amount** - withdrawal and deposit as printed; or, with one amount column, a withdrawal if the Dr/Cr column says D or the amount is negative.
- The **channel**, read from the narration: tax, interest, charges, loan/EMI, salary, cheque, NEFT, RTGS, IMPS, UPI, standing instruction (ACH/ECS/NACH), ATM, card (POS), cash, transfer or reversal - the nature (a charge) is

tested before the rail (NEFT), so *NEFT RETURN CHARGES* is a charge.

- **Reference numbers** - UTRs, 6-digit cheque numbers, 12-digit UPI numbers - with branch IFSC codes removed first so a branch code is not taken for a UTR.
- The **counterparty** - the longest run of letters left once the codes, handles, account numbers and dates are taken out.

The bank name (21 banks are recognised by name), the account number and the IFSC are read from the lines above the heading. Opening and closing balances, total lines and page footers are recognised and skipped.

The running balance is checked on every row: the previous balance plus this line's movement must equal the printed balance within ₹1. Rows where it does not are flagged, a note says "*The running balance does not tie on N row(s)… The statement may have been edited, or a column was read wrongly.*", and the reconciliation still runs.

How your bank book is read

The same heading rules, with Tally's columns: Date, Particulars (taken as the party), Vch Type, Vch No., a reference, Debit (money into the bank) and Credit (money out). The opening-balance line is read; the closing balance is worked out from the entries.

✗ A bank-book line with no date is dropped (Tally leaves a repeated date blank on some exports) - the party-statement reader carries the date down, the bank-book reader does not.

✗ A bank book with one Amount column instead of Debit and Credit is not supported.

✗ An overdrawn (credit) opening balance loses its minus sign; without an opening-balance line the book is taken to start at zero, and a *difference in opening balances* line appears.


How lines are matched

Pass	Result	What must agree
1	**Matched**	The same amount to the paisa, and a reference on both sides (a UTR or cheque number on the statement found in the voucher number or reference)
2	**Matched**	The same amount to the paisa and dates within 7 days; the nearest date and most similar name win. Pairs whose names differ are marked
3	**Timing difference**	The same amount, dates 8 to 45 days apart, and similar names or matching references
4	**Amount differs**	Amounts differing by more than the tolerance but by no more than ₹500 or 5%, dates within 7 days, and similar names or references
5	**Several entries in one**	One bank line equal (within the tolerance) to 2, 3 or 4 book entries in the same direction within 7 days
6	One-sided	Whatever is left, sorted into what it most likely is (below)

A payment is never matched with a receipt.

Left in the bank only: *Bank charges not in books*, *GST on bank charges not in books*, *Interest credited / debited, not in books*, *Loan or EMI debit not in books*, *Standing instruction not in books*, *ATM withdrawal not in books*, *Reversal or return not in books*, *Credit in bank, not in books*, *Debit in bank, not in books*. Left in your books only: *Cheque issued, not presented* (every payment) and *Deposit made, not credited* (every receipt); a payment more than 90 days old is marked stale.

The reconciliation statement

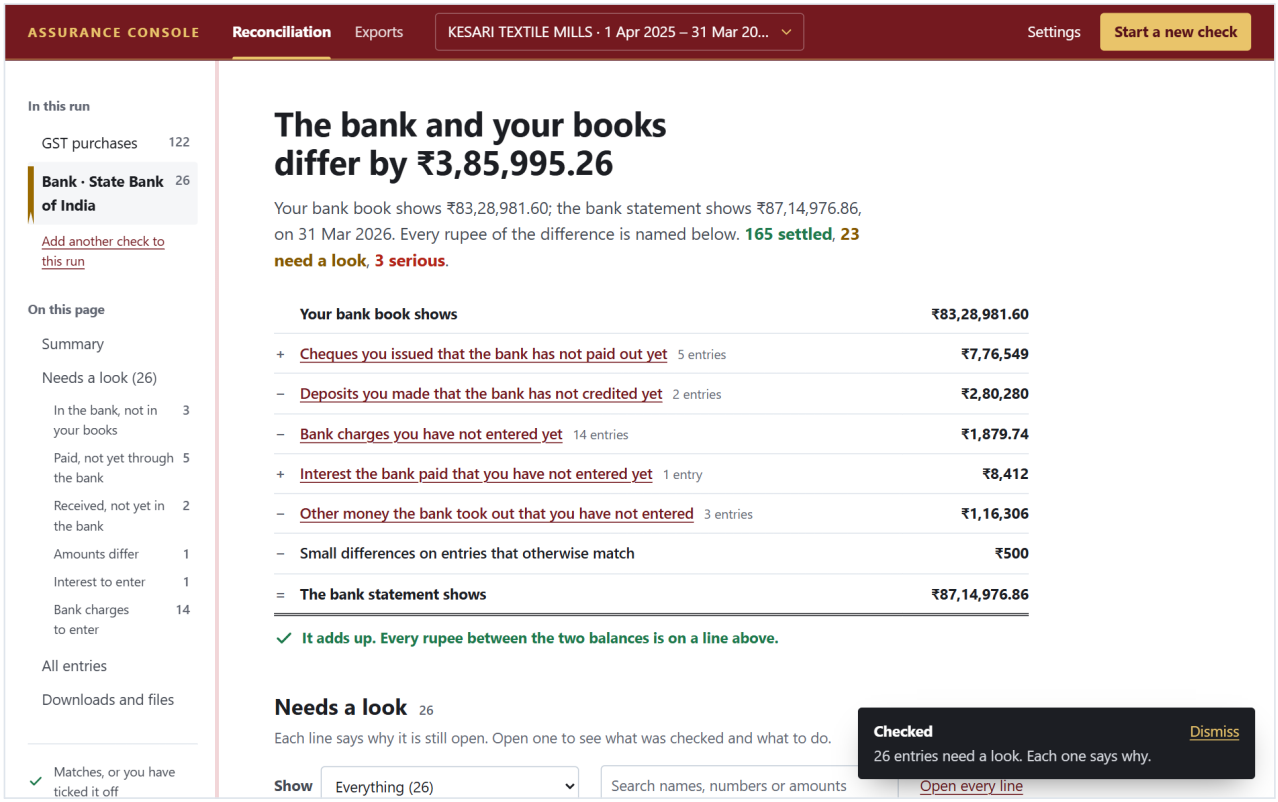


A bank check: the two balances, every difference on its own line, and the proof that it adds up.

The working starts from **your bank book's balance**, adds or takes away each group - cheques you issued that the bank has not paid out, deposits not yet credited, bank charges and interest you have not entered, other money the bank took out or received - then any differences on matched lines and in the opening balances, and ends at **the bank statement's balance**. When every rupee is accounted for it says "*It adds up.*"

If it does not add up, the leftover is shown as *Not explained – a figure was probably read wrongly*, and the headline becomes "*₹X of the difference cannot be explained*". Because every group is worked out from the movements themselves, a leftover means a line was dropped or misread, or the opening balance was picked up wrongly - not that something was forgotten.

> The leftover can only catch a misread when the statement has a balance column. Without one, the closing balance is worked out from the lines read, so the working always adds up and cannot catch a misread figure.

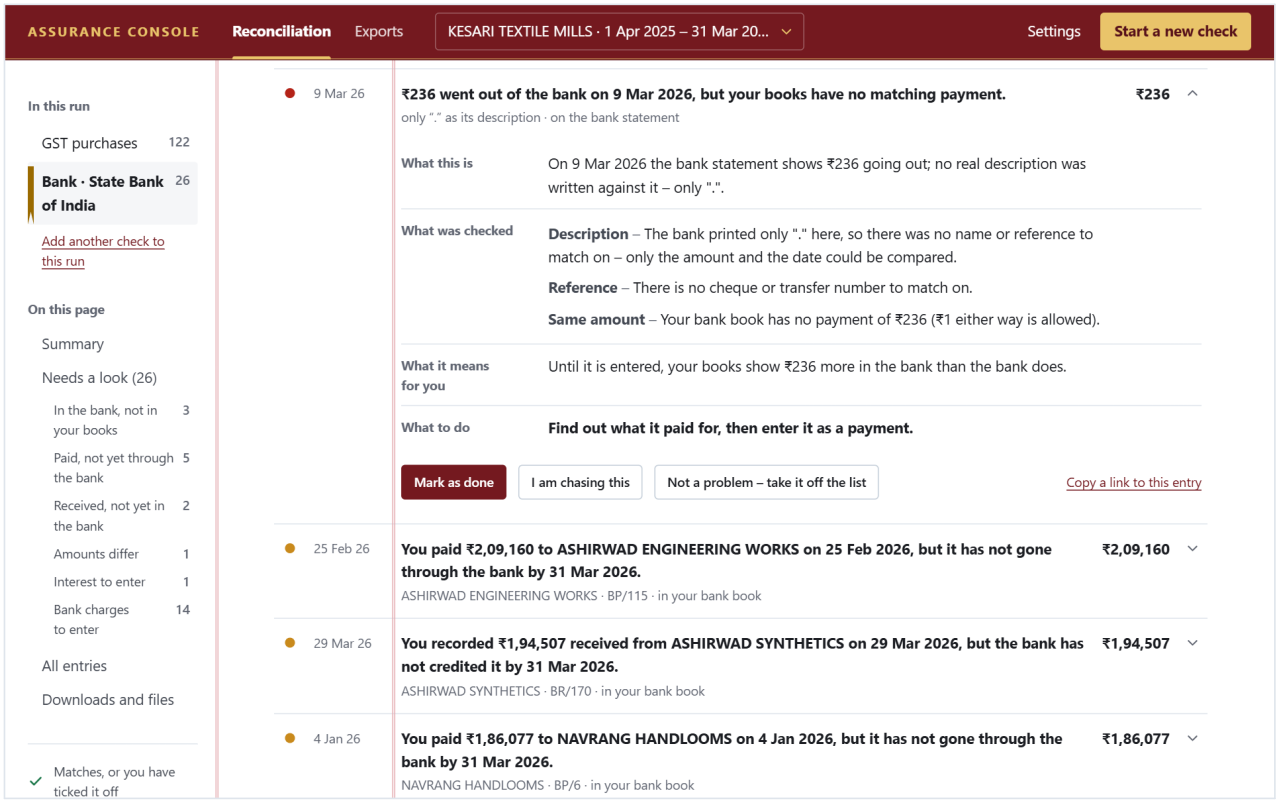

Even a bank line described only as "." explains itself.

What else it finds (in the downloads)

Stale cheques (more than three months old - reverse and reissue); amounts that differ between bank and books; bank charges never booked (with the GST on them); direct debits never booked; credits in the bank with no entry; possible duplicate payments (same party and amount within 7 days); large cash movements of ₹2,00,000 or more (Section 269ST); a running balance that does not tie; and narrations too unclear to classify. Also a table by channel and a month-by-month table.

Downloads

- **Excel workbook** (up to 12 sheets): the BRS; every pair and one-sided line with its reason; unpresented cheques, uncredited deposits, charges, bank debits, bank credits and interest not booked (each when there are any); findings; by channel; monthly; and the sources (files, bank, account, IFSC, balances, and whether the running balance tied).
- **PDF working paper**: the statement, the charges, what needs attention, each schedule (40 rows each), how the matching was done, and the sources.
- **Every entry as CSV** and **The bank reconciliation statement (CSV)**.

What the bank check cannot do

✗ Pair two lines one-to-one whose amounts differ by a few rupees: a one-to-one pair needs the same amount to the paisa; *Allow a difference* applies to the *Amount differs* test (more than the tolerance) and to several-in-one groups.

✗ Read "Dr" or "Cr" written after a balance or amount (an overdrawn balance printed as "1,000.00 Dr" breaks the running-balance check), or a trailing minus sign.

✗ Reverse a statement listed newest-first; it is read in the order printed.

✗ Match several bank lines to one book entry (only one bank line to several book entries).

✗ Re-match with different settings without adding the files again, or pair two lines by hand.

✗ Show the findings, charges and channel tables on screen - they are in the downloads.

- ✗ Filter either file by date: book entries after the statement ends appear as unpresented or uncredited (the explanation says so). Give it two files that cover the same period.
- ✗ Treat TDS or TCS debits other than as *GST on bank charges*, or check bank-charge GST against your GSTR-2B.

A party's statement

The party check compares a supplier's or customer's statement of account with your ledger for them, and builds a bridge from your balance to theirs in which every rupee is named. For a supplier it can also check their bills against what they filed in GSTR-2B, and it drafts a balance confirmation letter.

What you give it

- **Their statement** - whatever they sent: Excel, PDF, or a photo of a printout.
- **Your ledger for them** - their ledger account from Tally, for the same period.
- **They are your** - *Supplier (you owe them)* or *Customer (they owe you)*.
- **Their name** - read from their statement unless you type it.
- Under **Matching settings**: **Allow a difference of (₹)** (default ₹1) and **Also check their bills against GSTR-2B** (on by default).

How the statements are read

The heading row is found as for bank statements, with the columns a ledger uses: Date, Particulars, Vch Type, a document number (*Invoice No.*, *Vch No.*, *Bill No.*, *Ref*), Debit, Credit, Balance, and Tally's *Gross Total* for columnar ledgers. The party's name, your company's name, their GSTIN and the period are read from the lines above.

- **One Amount column with a Dr/Cr column** (headed *Dr/Cr*, *Cr/Dr*, *Type* or *Indicator*): each amount is a debit or a credit as its flag says - *Dr*, *D* or *Debit*; *Cr*, *C* or *Credit*; or a voucher type such as *Sales* or *Receipt*. A second Dr/Cr column right of the balance says whether that balance is a debit or a credit, and a Dr/Cr on the closing-balance line is read the same way.
- **A workbook with a sheet per ledger**: your ledger's sheet is the one whose ledger name matches the party named on their statement (75% alike or more), otherwise the only readable sheet, otherwise the largest.
- **Tally quirks handled**: *To/By* in the Particulars column with the ledger name in the unnamed column beside it; a blank date meaning "same as the line above"; the grand-total line that puts the debit total in the date column; a "Page 2" footer not taken for ₹2.
- **Both sides on one sign**: every entry becomes "owed to the party" - their debit or your credit - so a purchase is plus on both sides and a payment minus.
- **Entry kinds** are read from the words: invoice, payment, credit note, debit note, TDS, interest, opening balance.
- **Their printed closing balance** is checked against their own entries; a difference of more than ₹1 marks every entry on their side (in the downloads).

Two-sided and interest statements


A statement printed with debits on the left of the page and credits on the right (two date columns) is unfolded into one list. When the statement is an **interest statement**, the rate, credit days, interest and TDS are read, and the arithmetic is checked line by line: each product (amount × days ÷ the year basis, which it works out: 360, 365 or days), the days from each date to the period end, the column totals, the net product, the interest at the stated rate, TDS at its rate, and the ledger balance printed against the entries. Each problem is reported in words - "*12 Jan: ₹50,000 for 79 days gives a product of ₹39,50,000, but the statement prints ₹3,95,000.*"

How entries are matched

Pass	Result	What must agree
1	**Agrees**	The same document number (or the same last 3-4 digits) and the same amount to the paisa
2	**Agrees**	The same amount to the paisa and dates within 10 days
2b	Interest and TDS for the period	All interest entries on each side compared as one total (and TDS likewise): agreeing within the tolerance, or *interest worked out differently / TDS differs*
3	**Same amount, different dates**	The same amount, 11 to 60 days apart
4	**Amounts differ**	The same direction, and the same document number (any difference) or dates within 10 days with a difference of at most 12%
5	One-sided	Their bills, their credits or credit notes missing from your ledger; your entries, payments or debit notes missing from their statement

Names are not compared - both files are about the same party. Disputed amounts, and anything open for more than 180 days, are red.

The bridge

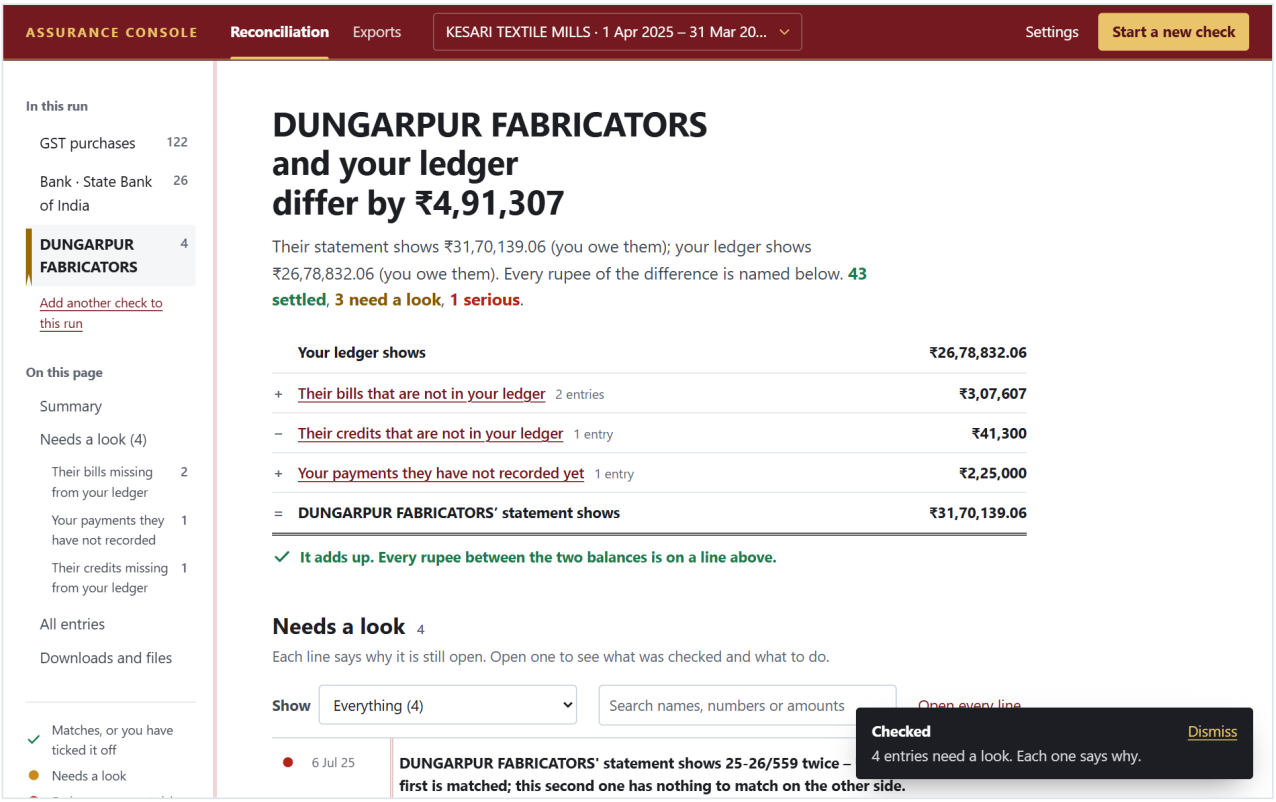

A party's statement: who owes whom on each side, and the bridge that ties the two.

From **your ledger's balance**, the bridge adds or takes away: their bills not in your ledger; their credits not in your ledger; your entries not in their statement; your payments they have not recorded; differences on documents that otherwise agree; interest and TDS as they worked them out against yours; and any difference in opening balances - ending at **their statement's balance**, with "*It adds up.*"

> The party bridge always adds up, because both closing balances are worked out from the entries that were read. It shows where the difference lies; it cannot prove that their statement was read correctly. That is what the interest-statement checks and your own spot-check are for.

When interest differs, the app estimates how much of the difference comes from payments one side has not recorded (the principal times the days to the period end at their rate) and says whether that explains all of it.

Against GSTR-2B (suppliers)

If their statement shows a GSTIN, and a GST check holding that supplier's GSTR-2B rows has been saved (the newest of the last twelve GST checks, in any run), every bill on their statement is looked up by its number: *agreed with the return*, *filed at a different value*, or *never filed in GSTR-1* - the last being credit you cannot take until they file. The results are in the findings, the Excel, the PDF and the letter.

The balance confirmation letter

Balance confirmation letter opens a draft on the page: the date, your balance as per your ledger, their figure, every difference grouped and listed (up to 12 per group), interest and TDS disagreements, disputed documents, bills not in your GSTR-2B, and a request to confirm. Fill in **Write to** and **Their email**; **Copy the letter**, **Open it in your email** (when an email is known), or **Save these details and redo the letter** (saves the contact to your supplier book, when their GSTIN was read).

Downloads


- **Excel workbook** (up to 12 sheets): the bridge; every entry with its reason; a sheet per bridge group; findings; against GSTR-2B, bills not filed and filed differently (when checked); ageing; sources.
- **PDF working paper**: the balances, the bridge, findings, what they filed, each group and the disputed documents.
- **Every entry as CSV** and **The balance working (CSV)**.

What the party check cannot do

- ✗ Tell which way an amount went when one Amount column has no Dr/Cr column, no voucher type and no minus sign: it is taken as a debit. A single Dr/Cr column placed right of the balance is read as the balance's, so it cannot direct the amounts.
- ✗ Read a document number when the file has no number column: the first word of four or more letters in the particulars is used instead (for "Sales - MH/25-26/0441" that is SALES), which weakens number matching and the GSTR-2B check.
- ✗ Include journal vouchers from a columnar ledger that has no Debit/Credit column (they are left out, with a warning).
- ✗ Show on screen that their printed closing disagrees with their own entries, or which sheet of a workbook was used.
- ✗ Use the customer wording exactly: for a customer, some one-sided lines are labelled as if from a supplier's point of view. The figures are right; only the labels are.
- ✗ Check customers against GSTR-1, re-match without adding the files again, or pair entries by hand.
- ✗ Keep the reading notes (an OCR notice, left-out vouchers) after the first showing - they are not shown when the run is opened again.
- ✗ Put the confirmation letter in a download - it is copied or opened in your email.

Exports: a register per exporter

The Exports part replaces the spreadsheet an exporter keeps by hand. You drop documents on a register as they arrive - the shipping bill at clearance, the bill of lading when the ship sails, the GSTR-1 when it is filed, the bank's advice when the money comes in, the ICEGATE and DGFT downloads when you fetch them - and every invoice's line shows what has arrived, what is missing, when the money is due, whether the IGST refund and drawback came back, and whether an eBRC exists.

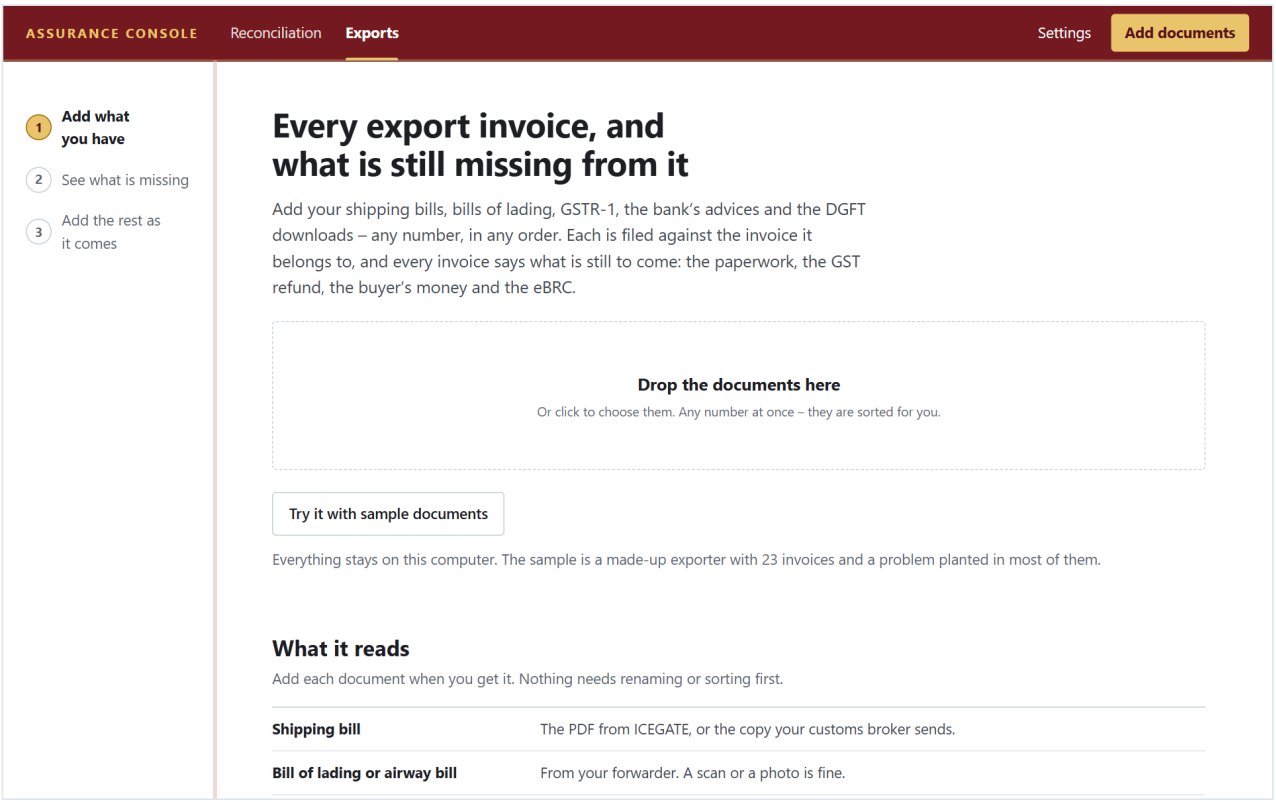

The Exports start page: drop any number of documents, in any order, or try the sample.

Registers

A **register** is one exporter's documents. Documents dropped on the Exports start page, and the sample, always start a new register; documents dropped while a register is open go into it. A register is named from the exporter on its shipping bills (*Kesari Textile Mills Private Limited · exports*). **The whole register is worked out again every time it is opened**, from every document posted to it and today's date, so deadlines move day by day and a document added today can settle a question an older one left open.

The documents it reads

Document	How it is recognised	What is read
Shipping bill (ICEGATE PDF)	"INDIAN CUSTOMS EDI SYSTEM" with "SHIPPING BILL"	Port, SB number and date, IEC, GSTIN, mode, AD code, destination, exporter, buyer, LEO date, containers; each invoice (number, date, INCOTERM, value, FOB, currency, rate); IGST per item; the IGST and drawback totals read from the Part I boxes by position; RoDTEP

Document	How it is recognised	What is read
Bill of lading / airway bill (text or scan)	"BILL OF LADING", "B/L NO", "SHIPPED ON BOARD", "AIR WAY BILL", "AWB NO"...	BL number (tolerating OCR's "HI BL"), the invoice and SB numbers it names, shipped-on-board date, vessel, containers, port of loading, consignee
Invoice (PDF, scan or Excel)	"INVOICE" with "EXPORT", "IEC" or "CONSIGNEE"	Number, date, WPAY or LUT, currency, totals, buyer - used to settle which side is wrong in an SB005 mismatch
GSTR-1 (portal JSON, or the offline tool's EXP sheet)	The JSON's structure; the sheet's headings	Every Table 6A export invoice and every Table 9A amendment: type, number, date, value, port, SB number and date, taxable value, IGST, rate
Bank remittance advice (FIRA/FIRC, or a Remittance Transaction Advice like Kotak's)	"INWARD REMITTANCE", "FIRA", "REMITTANCE ADVICE", "REMITTANCE TRANSACTION ADVICE" - even run together in a scan - or "Purpose of Remittance" with a remitter	Reference, bank, credit date, remitter, currency and amount (written before or after the currency), rupee amount, rate, purpose code, whether an advance, invoice named; and when the bank shows it, the packing credit repaid out of the money and what reached your account
DGFT IRM list (Excel)	Its headings	Every inward remittance: IRM number and date, IFSC, AD code, currency, amount, available, status, remitter, purpose
DGFT eBRC list (Excel)	Its headings	Every eBRC: number, date, status, IRM, SB, invoice, realised value
ICEGATE shipping bill status	Its headings	Status and error code per SB
ICEGATE IGST refund and drawback status (download or a pasted web table)	Its headings	Per SB: the response code (SB000-SB006), status, scroll number and date, paid date, amount
ICEGATE drawback waiting on proof of payment	Its headings	SB, LEO date, drawback, expected date
Your bank's EDPMS statement (Excel, or PDF read as a table)	Its headings	Per SB: value, realised, outstanding, due date (including the bank's extension), status
Your own shipping bill register (for example "S. BILL DETAIL")	An SB number column plus GST or drawback plus register-only columns	Every row of every year tab: invoice, container, depot, port, SB, GST paid and received with its date, drawback and its date, error codes and notes, payment, bank


- ✓ Files you give it that it does not recognise are still kept, under *Not recognised*, and wait to be checked like any other: say what each is and fill in its numbers, or remove it.
- ✓ The same file added twice is kept once; a second copy of the same shipping bill is ignored.
- ✗ Only Table 6A and 9A are read from a GSTR-1, and only a GSTR-1 JSON carries the GSTIN the SB003 check needs.
- ✗ A workbook is read as one kind of document (the sheet it recognises best), except your own register, whose year tabs are combined.
- ✗ Old `.xls` files are refused; save them as `.xlsx`.
- ✗ Reading notes on recognised but incomplete documents (for example "No invoice row was found in Part II") are not shown on the page; the document's one-line summary shows what was found.

> The same month's GSTR-1 added twice (the portal JSON and the offline Excel, say) puts each invoice in Table 6A twice and flags it; the same IRM or eBRC list added twice lists each entry twice. Add each download once.

Checking what was read

Nothing you add goes into the register until you have seen what was read from it. Each document you drop waits at the top of the register under **Check what was read before it goes in**, and *To check* in the margin counts them. For each you see:

- what kind of document it was read as, the name it is kept under, and *read from a scan* if it was;
- the numbers that decide where it goes and the money on it - for a bill of lading its number, shipped-on-board date, the invoice and shipping bill numbers printed on it and its containers; for a shipping bill its number, date, port, invoices with their values, IGST and drawback; for an advice the amount, remitter, date of credit, reference, purpose code and any invoice it names - and, when the bank shows it, the packing credit repaid out of it and what reached your account; for a list, how many rows and the first few;
- **where it will be filed** - *Will be filed against KE/25-26/058*, worked out with the document in - or that it matches nothing on file yet. An advice that names no invoice says you will choose its invoices when you post it;
- with the AI checker, what it made of the document (see *The AI checker*).

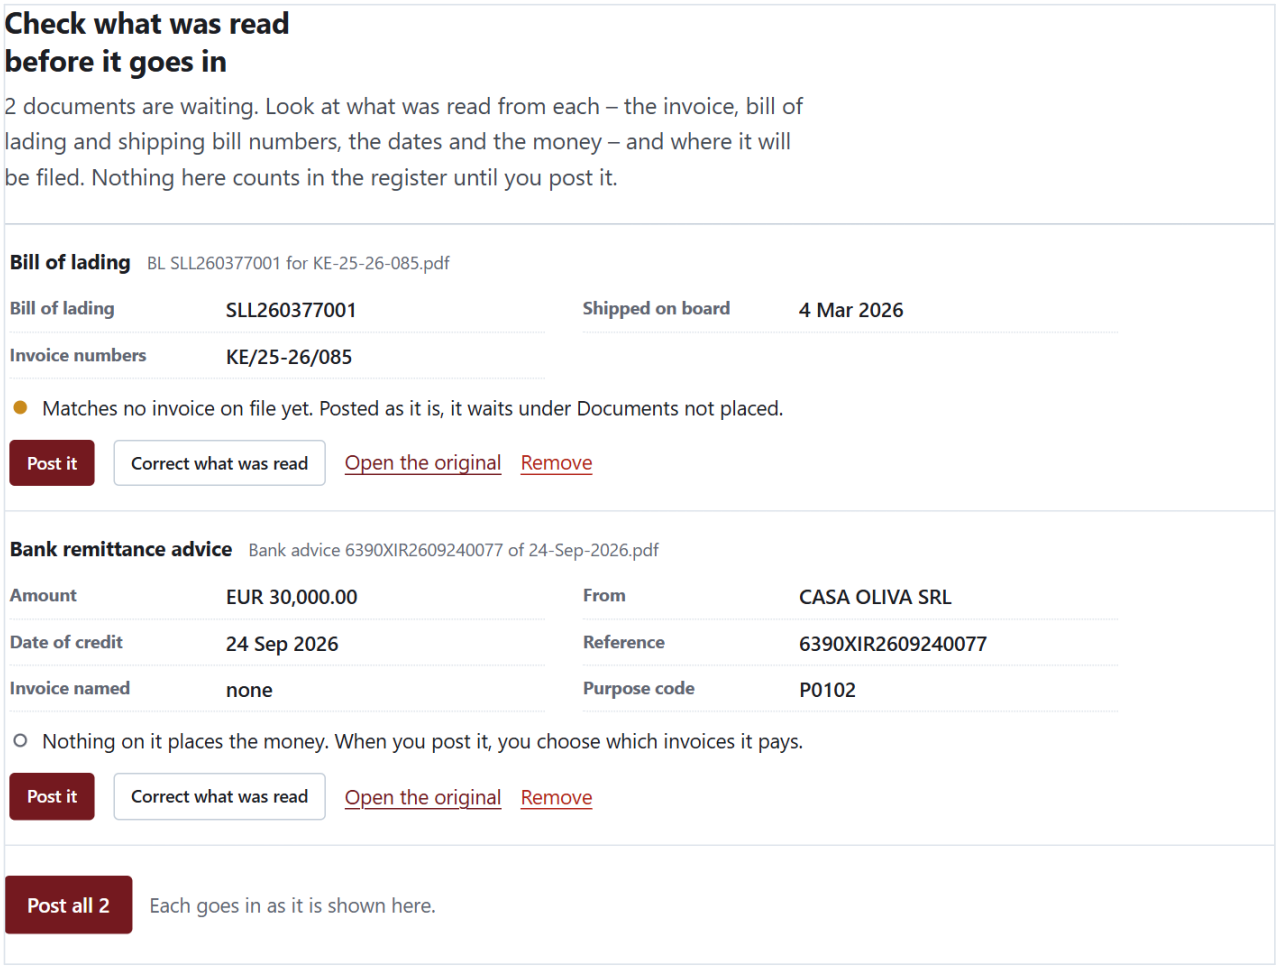

Check what was read: a bill of lading whose invoice number matches nothing on file, and an advice that names no invoice - neither counts until it is posted.

Then: **Post it** puts it in; **Correct what was read** opens it to put right; **Open the original** shows the file beside it; **Remove** drops it. **Post all** posts every one as shown. A bank advice posted whose money nothing places opens *Which invoices is this payment for?* straight away.

✓ Every document can be checked before it counts, and corrected at any time after.


✗ The sample is posted without a check - it is there to look around, not to verify.

✗ A file added twice is kept once; adding it again does not bring it back to be checked.

Correcting what was read

Correct what was read - on each document waiting, on every document in **Documents**, and beside *Open* in an invoice's file - opens a window with everything the reader filled in:

- **Fields**, each in its own box: numbers, dates (a calendar), amounts, codes, and lists like containers or the invoice numbers on a bill of lading (separate them with commas). A box you have corrected turns green and says what it was *read as*.
- **Tables** - the invoices on a shipping bill, a GSTR-1's Table 6A lines, the rows of an IRM, eBRC, status or EDPMS list, your register's rows. Each row has **Change** (its boxes open) and **Remove** (struck through, with *Keep it* to take that back); **Add a row** adds one; *Find a row* narrows a long table.
- **What this document is** - for a document read as the wrong kind, or not recognised at all, turn it into a shipping bill, bill of lading, advice or invoice; its boxes change to that kind's.

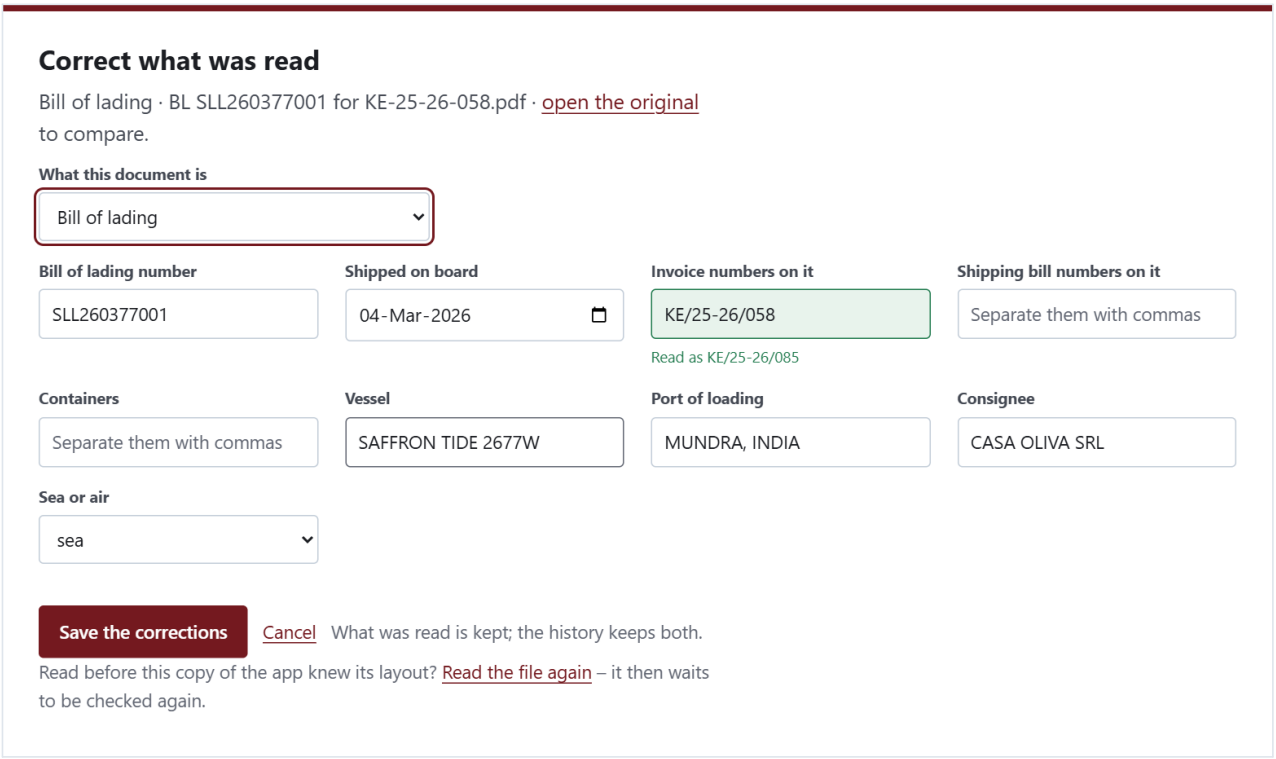

Correcting what was read: the bill of lading's invoice number put right - the box turns green and says what it was read as.

Save the corrections checks every value first - a date that does not exist, a word where an amount goes, a row with no number - and saves nothing until all of them pass, saying which box is wrong. Then the register is worked out again, the document is filed where its corrected numbers say, and the file it is kept under takes the name its corrected reading gives it.

Read the file again, at the foot of the same window, reads the kept copy once more with this version's reader - for a document read before the reader knew its layout, such as a bank advice taken for an invoice. The new reading replaces the old; a correction of yours that still says something different stays; and the document goes back under *Check what was read*, to be posted again. If it reads the same as before, nothing changes.

✓ What the reader found is never overwritten: your corrections are kept beside it. Put a value back and it is no longer a correction.

✓ A shipping bill's IGST total and WPAY or LUT follow its invoices once you correct them.


✗ Rows cannot be added to your own register here - add them to the workbook and add it again. They can be corrected or removed.

✗ A list (GSTR-1, IRM, eBRC, status, EDPMS, your register) cannot be turned into another kind of document.

> A correction belongs to the document it was made on. A newer download of the same list comes in as it was read, and is checked on its own.

History

The last section of every register, **History**, is its audit trail, newest first: each document added, checked and posted (and where it went), corrected - each change as *field: before → after* - and removed; each payment you set against invoices or cleared; each yes or no you gave on GSTR-1, a refund or drawback; and each button pressed on an open entry, with the entry's title. Every line has the date and time and who did it: the name in **Settings > Your name**, or the Windows account when that is blank. **Show more** reaches further back. The register's Excel download carries the whole history on a sheet of its own.

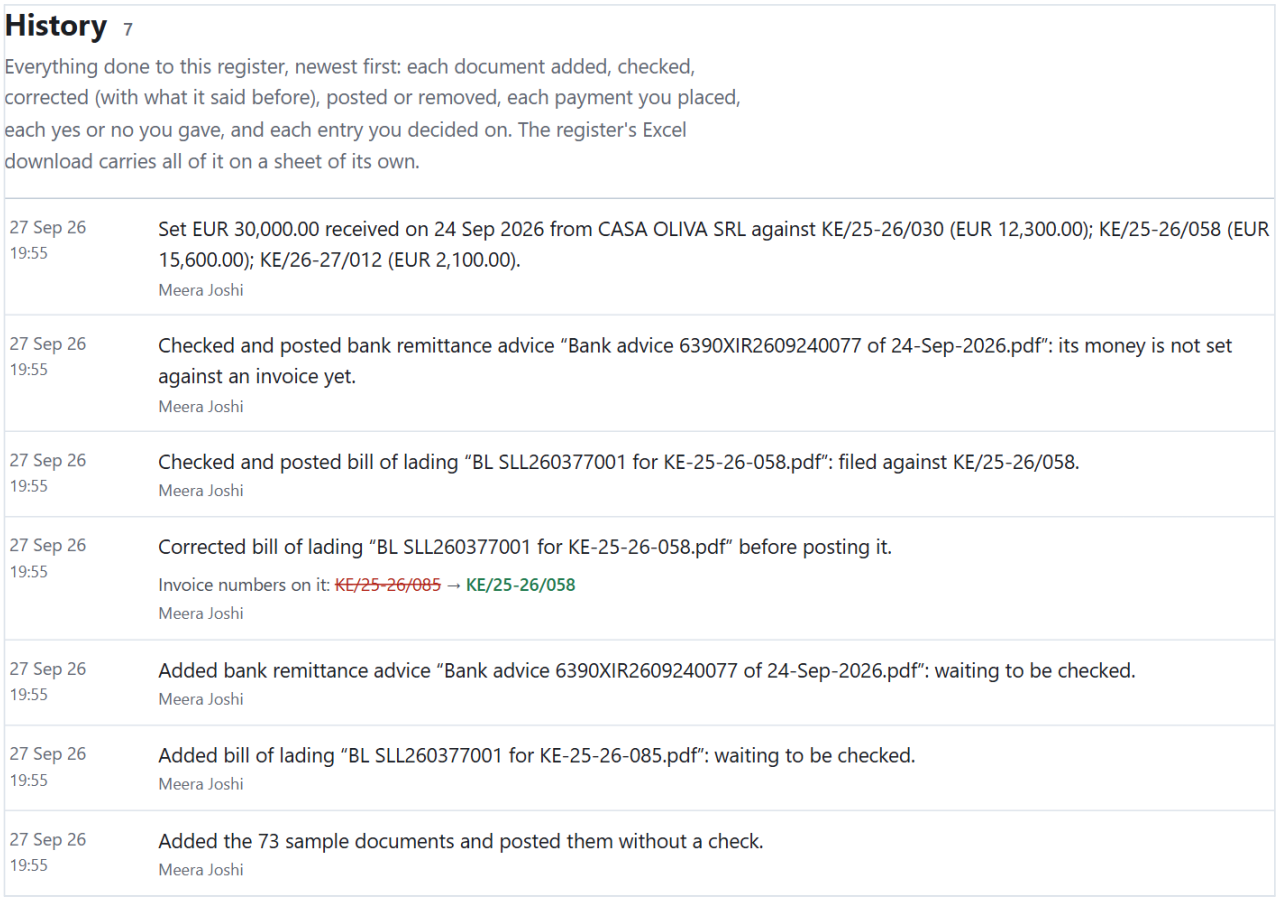


History: each document added, corrected (before and after) and posted, and each payment placed, with when and who.

✗ The history starts with this version: what was done before it is not in it.


✗ It is kept with the register: deleting the register deletes its history too.

The register

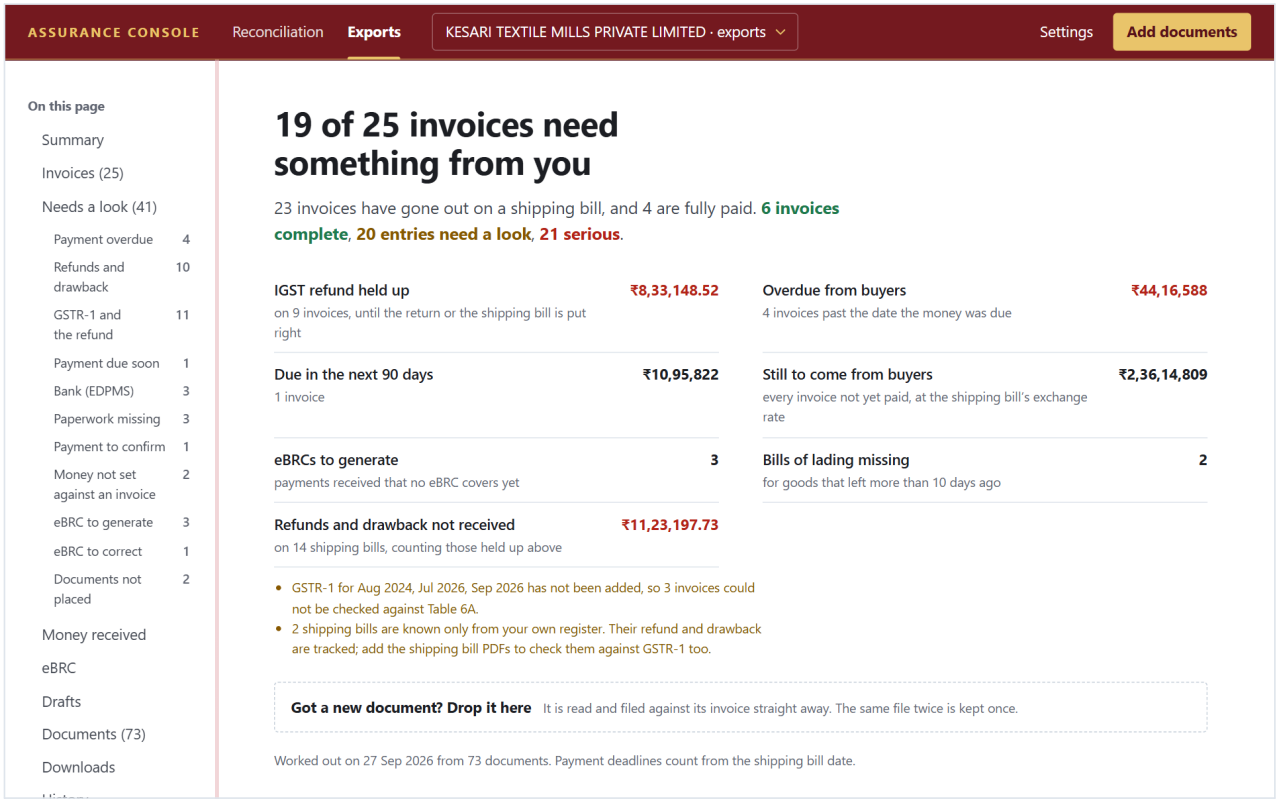

A register: the summary figures, then a line per invoice with a mark and a few words for each stage.


The summary opens with how many invoices need something from you, then the figures: **IGST refund held up**, **Overdue from buyers**, **Due in the next 90 days** (the number follows Settings), **Still to come from buyers**, **eBRCs to generate**, **Bills of lading missing**, and - when your register or ICEGATE's refund status is on file - **Refunds and drawback not received**. A second drop zone takes new documents at any time.

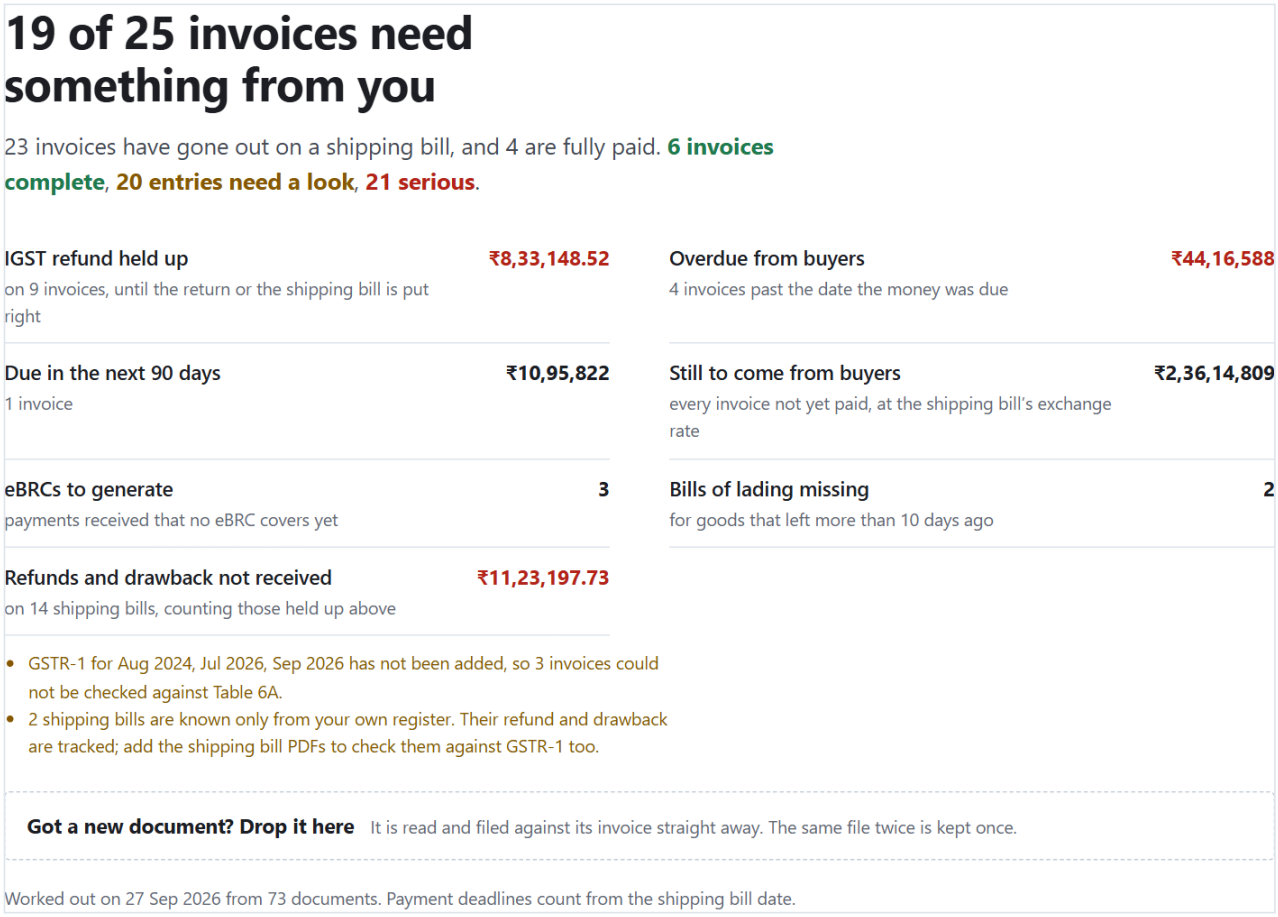

The register's summary: what is held up, overdue, due, and still to come.

Each invoice has one line with six columns - **Shipping bill**, **Bill of lading**, **GSTR-1**, **Payment**, **eBRC**, **Refunds** - each a mark and a few words: *4569456 · 8 Sep 2026*, *Not received*, *In 6A · Sep 2026*, *Overdue since 22 Apr 2026*, *To generate*, *IGST held · SB005*. Above the table: **Show** (every invoice, needs something from you, no shipping bill yet, no bill of lading yet, GSTR-1 not right, money still to come, payment overdue, eBRC to generate, refund or drawback not in), a year filter (when invoices span more than one year), and a search.

Click an invoice to open its **file**: every shipping bill with its IGST and *Open*; the bill of lading; its Table 6A line, with **Filed in GSTR-1?**; your invoice; the payment deadline with the rule behind it and every receipt counted, with why and a **Change**; eBRCs; the IGST refund and drawback with the ICEGATE code and scroll, with **Refund received?** and **Drawback received?**; the bank's EDPMS line; ICEGATE's drawback list; your register's row and notes; **Papers** - its own documents, which **Save them as one zip** hands over together; and what is still open.

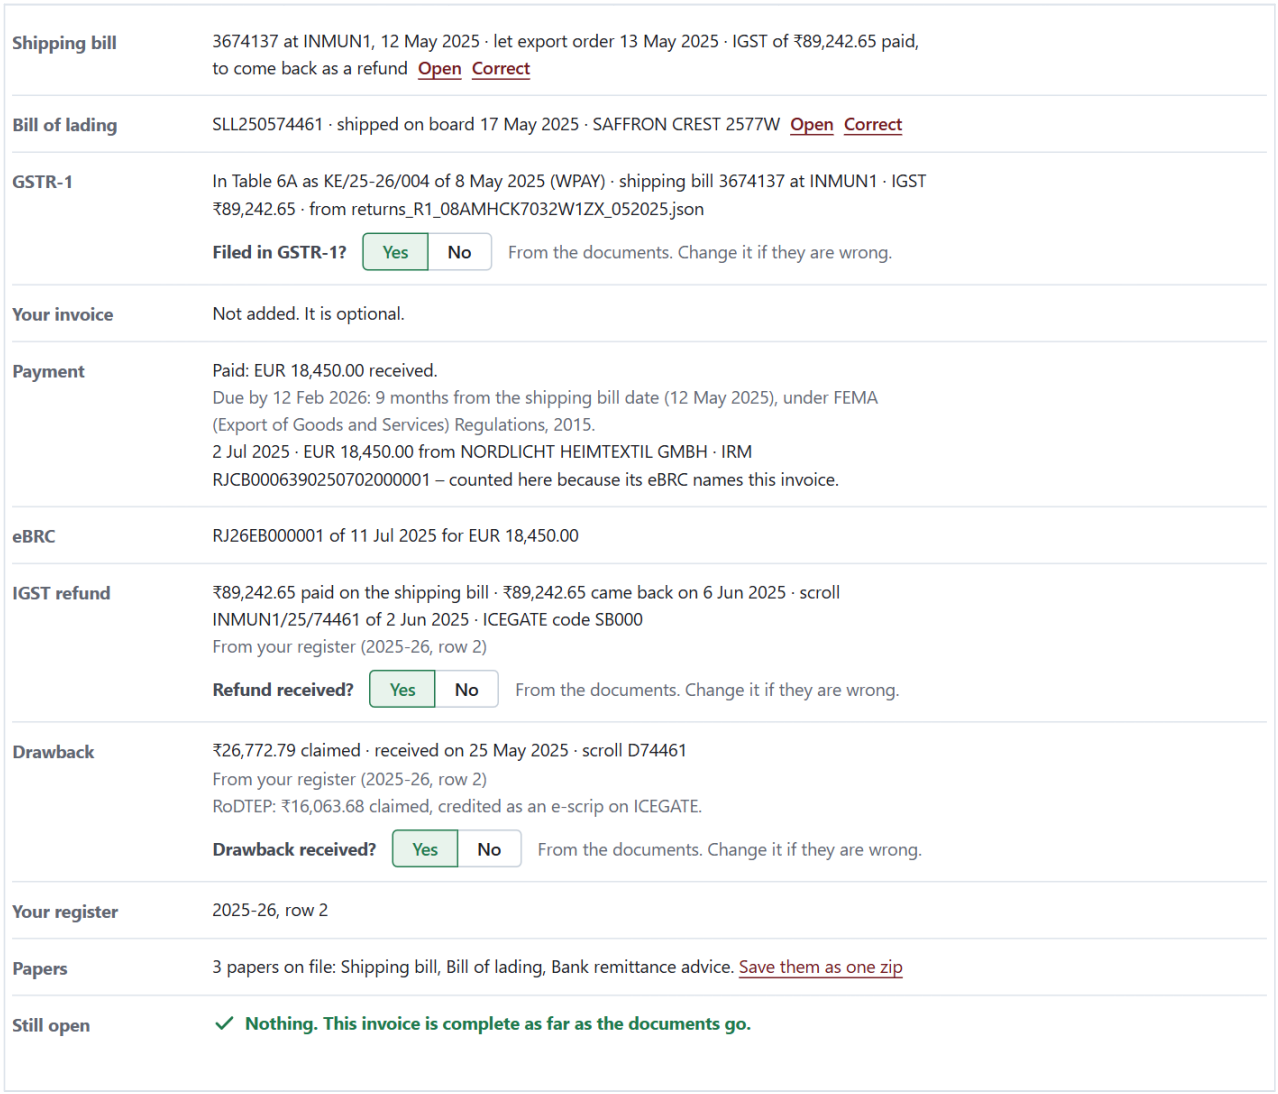

An invoice's file: every stage, the deadline and why, and its papers in one zip.

Payment deadlines

The time allowed to bring the money in depends on when the goods were shipped, under the FEMA regulations as they stood on 26 September 2026:

Shipped	Time allowed
Up to 13 Nov 2025	9 months
14 Nov 2025 to 4 Jun 2026	15 months
5 Jun 2026 to 30 Sep 2026	9 months
From 1 Oct 2026	15 months, or 18 if invoiced in rupees

The deadline counts from the shipping bill date by default - or the let export order date, or the shipped-on-board date on the bill of lading (**Settings > Exports**, since your bank decides which). Months are calendar months held to the month end. If the bank's EDPMS statement shows a **later** due date (an extension), that date is used. An unpaid invoice is **due soon** when 90 days or fewer are left (a setting), **overdue** after the date, and **over a year overdue** after 365 days. A shortfall of up to 1% (at most 150 units of the currency) is taken as the banks' charges and the invoice counts as paid.

✗ The deadline tracks the invoice value in foreign currency; rupee figures use the shipping bill's exchange rate.

✗ A line known only from your own register, with no invoice value, gets no deadline.

✗ The switch that gives 15 months to bills shipped before 14 November 2025 and still unpaid on that day does not check that they were in fact unpaid; it is off by default, the safer choice.


> The rules changed three times in twelve months. They are kept in a rules file (`exim_rules.json`) so a change means editing a value, not a new program - but they are only as current as that file.

Money in

Payments from abroad come from the DGFT IRM list and the bank's advices (an advice and an IRM for the same payment become one entry). **A payment is only counted against an invoice on evidence**: an eBRC that names both the invoice and the IRM; a bank advice that names the invoice; or your own say.

Which invoices a payment is for

When you add a bank advice and nothing names the invoice it pays - or it pays more than the invoice it names - a window opens: **Which invoices is this payment for?** It lists every invoice in the payment's currency with money still to come: first the one the advice names, then the buyer's own (the remitter's name at least 60% alike), each oldest first, then the rest. Beside each is how much is still to come and a box for how much of this payment goes to it.

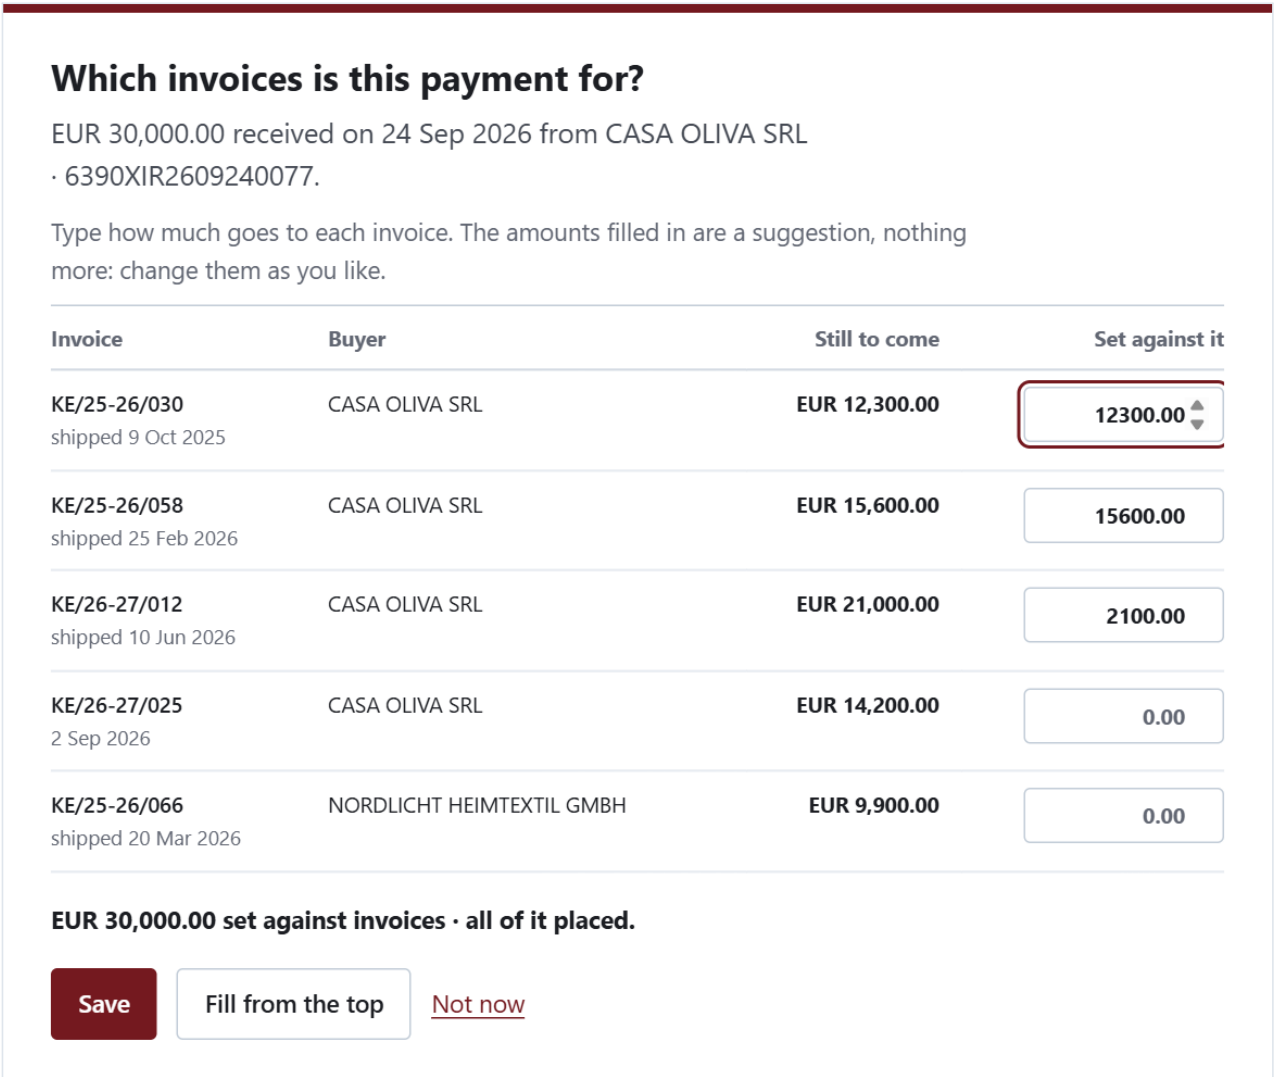

Which invoices is this payment for? EUR 30,000 from Casa Oliva spread over its invoices, oldest first - a suggestion to change as you like.

The boxes start filled in with a suggestion: the payment spread over the likeliest invoices, oldest first. Three invoices of EUR 10,000 and an advice for EUR 25,000 start as 10,000, 10,000 and 5,000. Change any amount; **Fill from the top** fills the list again in order. The line under the boxes keeps the total: all of it placed, how much stays on the payment, or how much too much. An amount larger than what an invoice has left, or a total larger than the payment, cannot be saved. What you leave over stays on the payment as *not yet placed* - an advance, or for an invoice not added yet. **Not now** closes the window and changes nothing; the payment waits under Money received, where *Choose invoices* opens the window again.

Every payment in **Money received** has **Choose invoices** (nothing placed yet) or **Change**, and so does every receipt in an invoice's file. Change opens the window with the payment as it stands, and **Clear what you chose** hands it back to what its documents say.

- ✓ Your split counts over the invoice the advice names; nothing else is added to a payment you have split.
- ✗ What an eBRC sets against an invoice is proof and stays: the window shows it and offers only the rest.
- ✗ The window opens by itself only for a bank advice just added, not for the payments in a DGFT IRM list or the sample; those have *Choose invoices*.

When you do not choose, the app **suggests** the best candidate - same currency, money still due, and a mix of how alike the remitter is to the buyer, whether the amount fits (within 1% or 150 units) and whether the money arrived after shipment. The suggestion is a *Payment to confirm* entry with **Yes, it is for invoice X**, **No, it is for another invoice** and **Split it over several invoices**. Yes counts it (with an Undo in the invoice's file); No means that pairing is never suggested again, and the next best is offered.

When no single invoice fits the amount but a run of one buyer's invoices does - oldest first, together coming to the payment or up to the banks' charges more - the suggestion is for all of them: *EUR 36,420 received on 8 Jul 2026 looks like payment for invoices KE/26-27/061, KE/26-27/062 and KE/26-27/063*, with what goes to each. **Yes - check the amounts and save** opens the window filled in that way; **No, it is for other invoices** stops it being suggested again. Two runs that would both fit are a guess, so then none is offered.

Money received

Every payment from abroad, from the DGFT IRM list and the bank's advices together.
A payment counts against an invoice only when its eBRC or the bank's advice names
it, or when you choose the invoices it is for.

Received	From	Amount	Counted against	Not yet placed	
2 Jul 25	NORDLICHT HEIMTEXTIL GMBH IRM RJCB0006390250702000001	**EUR 18,450.00**	KE/25-26/004 · EUR 18,450.00	✓ **EUR 0.00**	
10 Sep 25	MAPLE & THREAD HOME INC IRM RJCB0006390250910000002	**USD 22,800.00**	Nothing yet	● **USD 22,800.00**	Choose invoices
15 Oct 25	BRAMLEY LINEN CO LTD IRM RJCB0006390251015000003	**GBP 6,000.00**	KE/25-26/014 · GBP 6,000.00	✓ **GBP 0.00**	Change
20 Oct 25	SUNDARBAN TRADING PTE LTD IRM RJCB0006390251020000004	**USD 31,215.00**	KE/25-26/021 · USD 31,215.00	✓ **USD 0.00**	
12 Feb 26	NORDLICHT HEIMTEXTIL GMBH IRM RJCB0006390260212000005	**EUR 26,900.00**	KE/25-26/037 · EUR 26,900.00	✓ **EUR 0.00**	Change
2 Apr 26	MAPLE & THREAD HOME INC IRM RJCB0006390260402000006	**USD 11,200.00**	KE/25-26/055 · USD 11,200.00	✓ **USD 0.00**	
~~5 May 26~~	~~MAPLE & THREAD HOME INC~~ ~~IRM RJCB0006390260505000010 · cancelled~~	~~**USD 5,000.00**~~	~~Nothing yet~~	~~**USD 0.00**~~	
18 Jun 26	GLOBAL SOURCING SERVICES FZE 6390XIR2606180009	**USD 2,450.00**	Nothing yet	● **USD 2,450.00**	Choose invoices
20 Jul 26	BRAMLEY LINEN CO LTD IRM RJCB0006390260720000007	**GBP 5,000.00**	KE/26-27/008 · GBP 5,000.00	✓ **GBP 0.00**	Change
1 Sep 26	HOLMFIRTH INTERIORS LTD	**GBP 4,000.00**	Nothing yet	● **GBP 4,000.00**	Choose invoices

Money received: each payment, what it was counted against and why, and what is not yet placed.

- ✓ Advances (purpose code P0103, or "ADVANCE" on the advice) are never matched automatically; they wait until the shipment they pay for is added, or until you choose the invoices.
- ✓ An advance set against goods that had already gone when the money came is flagged under *Bank (EDPMS)*: the bank has the payment on the wrong code, and until it realises it against those shipping bills (purpose code P0102) EDPMS can go on showing them unpaid.
- ✓ Cancelled IRMs and eBRCs are shown struck through and never used.
- ✗ Payments in another currency from the invoice are never matched, suggested or offered in the window.
- ✗ An invoice can take no more than its value: a buyer who paid more leaves the extra on the payment.
- ✗ Your own register's PAYMENT column does not settle an invoice whose value is known; only payments on file do.

eBRCs

eBRC 3 to generate

DGFT makes eBRCs for free. What is listed here has been received and counted against an invoice, but no eBRC covers it yet. It is filled in on DGFT's bulk upload sheet, each row checked the way DGFT checks it.

Invoice	IRM	Amount	Ready to upload
KE/25-26/014 BRAMLEY LINEN CO LTD	RJCB0006390251015000003 15 Oct 2025	**GBP 6,000.00**	✓ Ready
KE/25-26/037 NORDLICHT HEIMTEXTIL GMBH	RJCB0006390260212000005 12 Feb 2026	**EUR 26,900.00**	● IFSC is missing - it is blank in the DGFT IRM list; copy it from the IRM on the portal
KE/26-27/008 BRAMLEY LINEN CO LTD	RJCB0006390260720000007 20 Jul 2026	**GBP 5,000.00**	✓ Ready

Download the bulk upload sheet

eBRCs on file

eBRC	Date	Invoice	Realised	Status
RJ26EB000001	11 Jul 25	KE/25-26/004	**EUR 18,450.00**	Active
RJ26EB000004	29 Oct 25	KE/25-26/021	**USD 31,215.00**	Active
RJ26EB000006	11 Apr 26	KE/25-26/0055	**USD 11,200.00**	Active
RJ26EB000099	30 Mar 26	KE/24-25/070	**USD 6,400.00**	Active

eBRC: payments counted against an invoice that no eBRC covers yet, each checked the way DGFT checks it.

Every payment counted against an invoice that no eBRC covers yet becomes an *eBRC to generate* entry and a row of the **DGFT bulk eBRC sheet** - DGFT's own columns, with a second tab checking each row the way DGFT does (IRM number and date, IFSC, AD code, purpose code valid for goods - P0102, P0103, P0104 or P0109 - SB details, currency code, and not mapping more of an IRM than is left on it). eBRCs on file are listed; an eBRC whose GST invoice or SB differs from the return is flagged.

✗ The app does not generate eBRCs - DGFT does that, free. It fills in DGFT's bulk upload sheet for you.


Refunds and drawback

From your own register and ICEGATE's status downloads, each shipping bill's **IGST refund** is *received*, *short*, *held* (ICEGATE shows a code), *not received*, *not due back yet* (within 45 days of shipment) or *unknown*; the **drawback** likewise (serious after 180 days). A refund is flagged only **on evidence** - your register lists it as not received, or ICEGATE shows a code. With no evidence it is *unknown*: no alarm, but the shipping bill goes on the **ICEGATE look-up list**.

Every shipping bill to look up - in its open entry, in its invoice's file and in the look-up list - shows **Look it up on ICEGATE**: the port, the SB number and the date the way ICEGATE's form asks for them (a click copies each one), and **Open the shipping bill enquiry**, which opens ICEGATE's public enquiry in your browser. That page needs no login, but you type its captcha. The IGST refund status needs your ICEGATE login: *Services* > *Enquiries* > *ICEGATE Enquiry*. Download or copy what ICEGATE shows, add it here, and the codes and scrolls fill in.

✗ The app itself never goes to ICEGATE: ICEGATE offers no way for other software to ask it, and its pages sit behind a login and a captcha that the app does not fill in for you.

Code	Means	What to do
SB000	Validated: matched with GSTR-1; the refund goes into a scroll and is paid to your bank	Nothing on ICEGATE; if no money arrives within a month of the scroll, check your bank account is validated for refunds
SB001	Shipping bill details wrong in GSTR-1	Correct Table 6A through Table 9A; it costs nothing
SB002	EGM not filed by the shipping line	Ask your forwarder or the line to file or correct it; the refund validates by itself
SB003	GSTIN on the shipping bill is not the return's	Same business: an undertaking to customs. Otherwise correct the return
SB004	Sent twice; the first record counts	Nothing, unless the first was the wrong one
SB005	Invoice number on the shipping bill and in 6A differ	Table 6A wrong: amend through 9A. Shipping bill wrong: the port route - a letter, the Annexure A table and a ₹1,000 challan per shipping bill
SB006	Gateway EGM not available (goods from an inland depot)	Ask the line to file the gateway EGM at the port

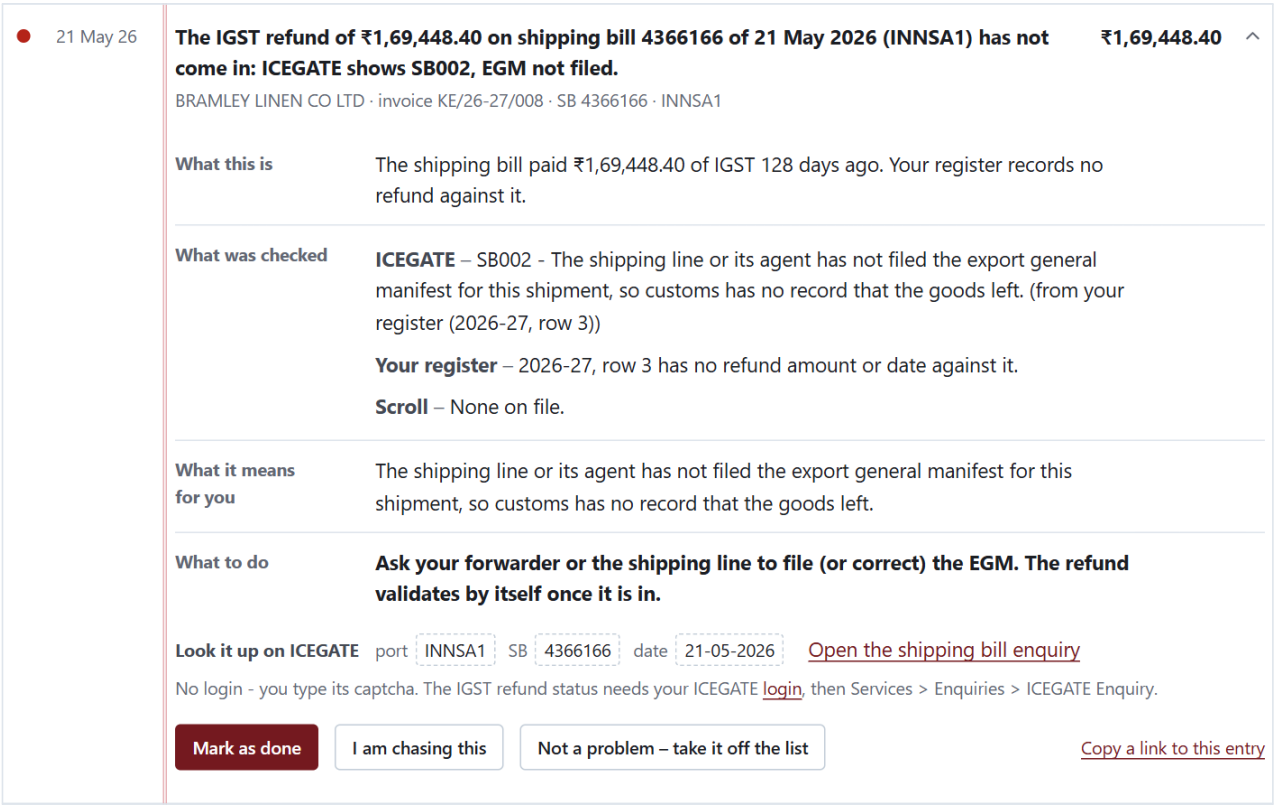

A refund entry: what was checked, and the ICEGATE code with what to do about it.

ICEGATE's list of drawback waiting for proof that the buyer paid is compared with your payments: *paid here - make sure the eBRC carries this shipping bill*; *not tracked here*; or *unpaid - proof due by …*, serious once the date passes (Rule 18 of the Drawback Rules, 2017, allows recovery).

Your own yes or no

Three questions in every invoice's file take your answer when the documents cannot give it: **Filed in GSTR-1?** under its Table 6A line, **Refund received?** under the IGST refund and **Drawback received?** under the drawback (the last two only where something was paid or claimed). Each has **Yes** and **No**; the one that counts is pressed - green for yes, amber for no - and the line beside it says where the answer came from:

- *From the documents* - the return, your register or ICEGATE's download says so. Press the other button if it is wrong.
- *No document says yet* - nothing on file answers it. Press Yes or No.
- *You marked it … on (date)* - your answer, with what the documents say if they disagree, and **Undo** to go back to them.

Your answer counts everywhere the documents' would: the register's columns, the open entries, the figures, the ICEGATE look-up list and the downloads. A GSTR-1 you mark **filed** clears *not in your GSTR-1* even when that month's return is not added (and a return downloaded before it was filed can be marked **not filed**). One you mark **not filed** becomes an open entry, serious when IGST was paid, even with no return on file. A refund or drawback you mark **received** stops being chased; one you mark **not received** is chased like any other - held if ICEGATE gave a code, not due back yet within 45 days of shipment (30 for drawback), late after.

✗ A refund marked received by hand has no date or amount of its own: the file shows the amount paid on the shipping bill as having come back.

> Your answer stands even when a document added later says otherwise - the file shows both. Undo it once the document is right.


The bank's EDPMS statement

Three checks, when the statement is on file: the bank shows a bill **open** that is paid here (ask the bank to close it, giving the IRM or eBRC); **closed** with no receipt on file here (add the advice or IRM); or **missing** - a shipping bill inside the statement's dates, unpaid here, that the bank does not list (ask the bank to link it to your AD code). A later due date on the statement is taken as the bank's extension.

Everything it checks

Check	When it fires	Serious when
Not in GSTR-1	A shipping bill exists, the month's GSTR-1 is on file, and the invoice is not in Table 6A - or you marked it *not filed* (unless you marked it *filed*)	IGST was paid (WPAY)
In Table 6A twice	Two 6A lines for one invoice	-
SB001	Table 6A's shipping bill number is blank, or its number, port or date differs from the shipping bill	WPAY
SB005	The 6A invoice number differs from the shipping bill's, character for character, or the dates differ	WPAY
IGST differs	Both WPAY, IGST more than ₹1 apart	The shipping bill's is higher
WPAY/LUT differs	6A's export type is not the shipping bill's	Always
SB003	The shipping bill's GSTIN is not the GSTR-1's (says whether the PAN is the same)	WPAY
No shipping bill	A 6A line or invoice more than 15 days old with no shipping bill	-
No bill of lading	A shipping bill more than 10 days old with no BL	-

Check	When it fires	Serious when
Payment overdue / due soon	The deadline passed / is within 90 days (notes Rule 96B or 96A, and the ₹10 lakh declaration from 1 Oct 2026)	Overdue
Payment to confirm	A suggested payment (Yes, No, or split it over several invoices)	-
Advance / money not placed	A payment with money left and nothing to suggest, or left over from your split (*Choose the invoices it is for*)	-
eBRC to generate / to correct	See eBRCs	-
Documents not placed	An eBRC, BL or file that belongs to nothing on file	-
IGST refund not received / short / not entered	See Refunds (short means more than ₹100 less came back; not entered means ICEGATE shows it paid but your register does not)	Not received
Drawback not received / proof of payment	See Refunds	After 180 days / once proof is overdue
EDPMS open / closed / missing	See EDPMS	-

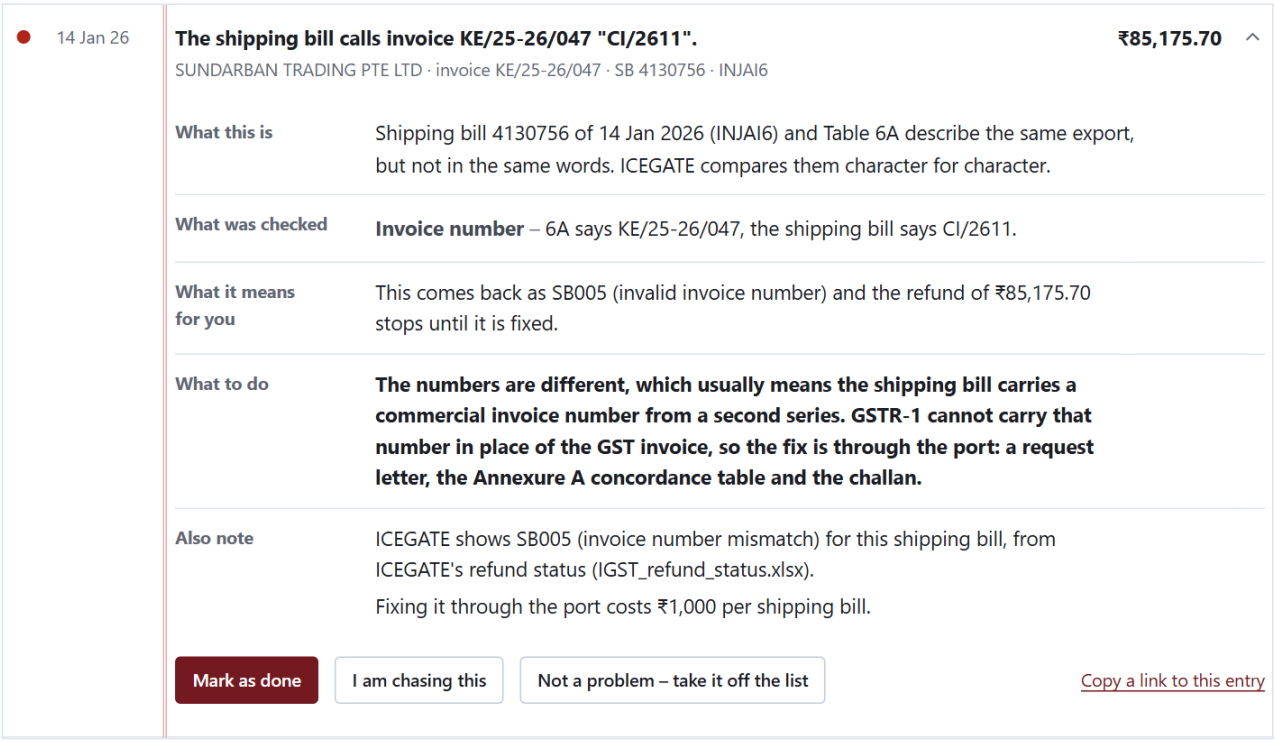

An SB005 mismatch: which side looks wrong, and the route to fix it.

For an **SB005** mismatch the app works out the fix route: if your invoice agrees with the shipping bill, the slip is in Table 6A (**Table 9A**, free); if your invoice agrees with 6A, or the numbers are entirely different (a second invoice series), the shipping bill is wrong (**the port route**, ₹1,000 a shipping bill); if only a digit or the date differs and there is no invoice to settle it, it asks you to add the invoice (**check first**).

- ✗ Links between documents treat O and 0, and I, L and 1 as the same (scans confuse them); comparisons of 6A with the shipping bill do not.
- ✗ If both the invoice number and the shipping bill number in 6A are wrong, the 6A line cannot be joined to its invoice: it appears as a separate invoice with no shipping bill, and the real invoice as not in GSTR-1.
- ✗ A difference only in leading zeros (033 against 0033) is sent to the port route, even with your invoice added.

✗ Ticking an entry off does not change the GSTR-1 words in the register, the summary figures, the drafts or the Excel's *Needs a look* sheet.

Drafts

Drafts

The papers that fix what is listed above, filled in from the register. Each is a draft: read it, fill in what is in square brackets, and sign it.

SB005 letters for the port (zip)	2 shipping bills at INJAI6: a request letter for each customs station with the Annexure A table, and a challan schedule for ₹2,000.
Table 9A worksheet (Excel)	7 lines to amend in GSTR-1, and 1 export to add to this month's Table 6A, each with the date to do it by.
SB003 undertaking (Word)	1 shipping bill filed under another GSTIN of your PAN, with the undertaking customs asks for.
Declaration to the bank (zip)	3 bills of up to ₹10 lakh to close or reduce in EDPMS: bank charges taken abroad, and overdue amounts if they will not come.
Request to the bank for more time (zip)	5 bills overdue or falling due, with the date to ask for beside each.
Shipping bills to look up on ICEGATE (Excel)	14 shipping bills whose refund or drawback is not confirmed as received.

1 more SB005 case needs your invoice to say which side is wrong; it is in the Table 9A worksheet, marked to check first, and not in the port letters.

Drafts: the papers that fix what is listed, filled in from the register.

Only drafts with something in them are listed. Each is a draft: read it, fill in what is in square brackets, and sign it. The sender is your business from Settings, or the exporter on the documents.

- **SB005 pack** (zip) - for each port, a request letter to the customs IGST refund section, the **Annexure A** table (SB number and date, invoice number and date as on the SB and as in GSTR-1, IGST) as Word and Excel, and a challan schedule for ₹1,000 a shipping bill. Only cases where the shipping bill is the wrong side go in; *check first* cases go to the 9A worksheet instead.
- **Table 9A worksheet** (Excel) - every 6A line to amend, with the original and revised details, what changes and the date to amend by; and a sheet of exports missing from 6A to report in the current month.
- **SB003 undertaking** (Word) - for shipping bills filed under another GSTIN of the same PAN.
- **EDPMS declaration** (zip) - to the bank, for bills up to ₹10,00,000: bank-charge reductions, and overdue bills if they will not come.
- **Extension request** (zip) - to the bank, for bills overdue or falling due, asking for 180 days more.
- **ICEGATE look-up list** (Excel) - shipping bills whose refund or drawback is held, not received, or has no status on file, each with a link to ICEGATE's shipping bill enquiry and its date the way that page asks for it.

✗ Port names are known for Nhava Sheva (JNPT), Mundra, Mumbai and Chennai; other ports are named by their code.

✗ The extension request always asks for 180 days; the declaration draft does not check the 1 October 2026 start date.


✗ There is no PDF or CSV for Exports - Excel, Word and zip files.

Downloads

The register (Excel: the register with five stage columns, every open entry, money in, eBRCs), **the register in your own sheet's layout** (Excel: a tab per year with your columns - GST and drawback received and the date, the error code, payment), and **the DGFT bulk eBRC sheet** (when there are rows).

Picked up from your Downloads folder


Save an ICEGATE status download - or a DGFT IRM or eBRC list, or your bank's EDPMS statement - and when you come back to the app, the register offers it at the top: **In your Downloads folder**, what it is, its name and when it was saved, with **Add it** and **Not this one**. Add it and it waits under *Check what was read*, like anything you drop in; Not this one stops it being offered.

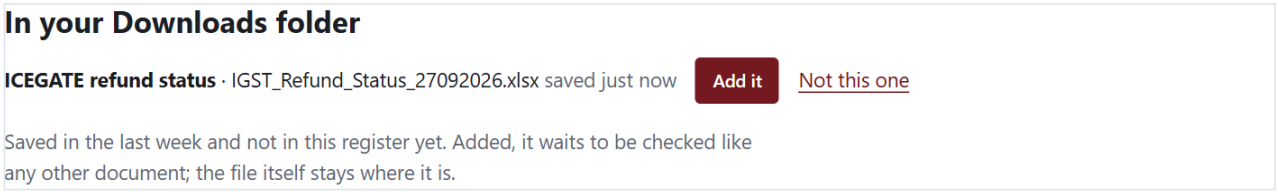

In your Downloads folder: an ICEGATE refund status just saved, offered to the register.

- ✓ Only Excel and CSV files saved in the last week, of a kind the register reads and not already in it, are offered.
- ✓ The app only reads the Downloads folder: nothing in it is moved, changed or deleted, and the file stays there after it is added.
- ✗ A PDF saved from ICEGATE is not offered; drop it in yourself.

Documents

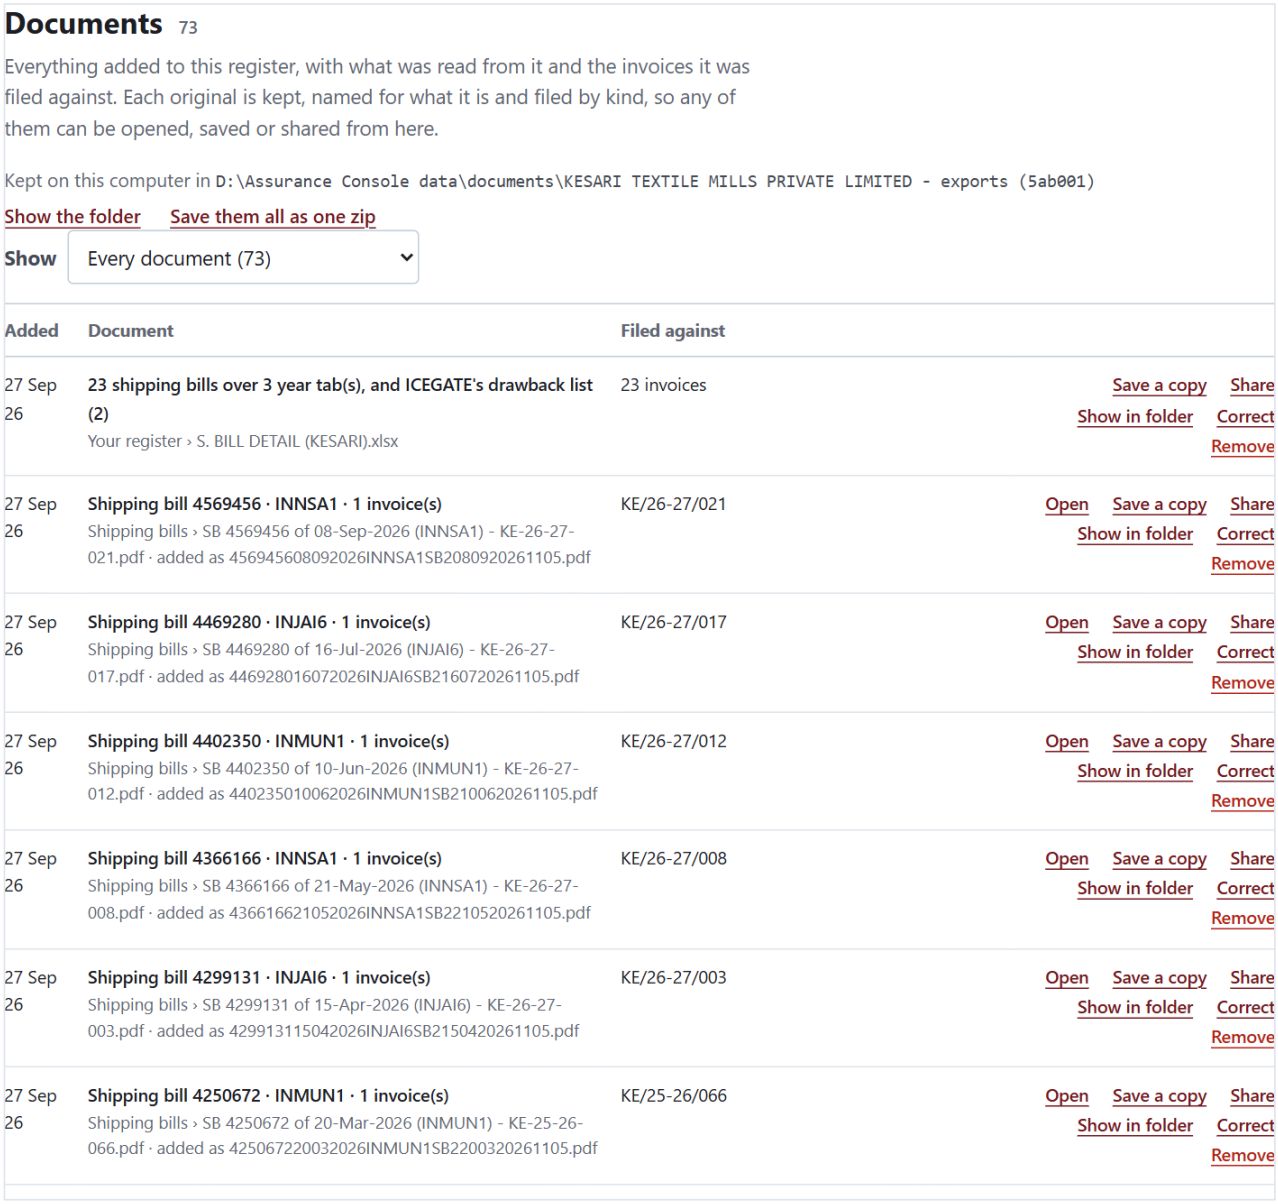

Documents 73

Everything added to this register, with what was read from it and the invoices it was filed against. Each original is kept, named for what it is and filed by kind, so any of them can be opened, saved or shared from here.

Kept on this computer in D:\Assurance Console data\documents\KESARI TEXTILE MILLS PRIVATE LIMITED - exports (5ab001)

Show the folder Save them all as one zip

Show: Every document (73)

Added	Document	Filed against	
27 Sep 26	**23 shipping bills over 3 year tab(s), and ICEGATE's drawback list (2)** Your register › S. BILL DETAIL (KESARI).xlsx	23 invoices	Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4569456 · INNSA1 · 1 invoice(s)** Shipping bills › SB 4569456 of 08-Sep-2026 (INNSA1) - KE-26-27-021.pdf · added as 4569456080920261NNSA1SB2080920261105.pdf	KE/26-27/021	Open Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4469280 · INJAI6 · 1 invoice(s)** Shipping bills › SB 4469280 of 16-Jul-2026 (INJAI6) - KE-26-27-017.pdf · added as 4469280160720261NJAI6SB2160720261105.pdf	KE/26-27/017	Open Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4402350 · INMUN1 · 1 invoice(s)** Shipping bills › SB 4402350 of 10-Jun-2026 (INMUN1) - KE-26-27-012.pdf · added as 4402350100620261NMUN1SB2100620261105.pdf	KE/26-27/012	Open Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4366166 · INNSA1 · 1 invoice(s)** Shipping bills › SB 4366166 of 21-May-2026 (INNSA1) - KE-26-27-008.pdf · added as 4366166210520261NNSA1SB2210520261105.pdf	KE/26-27/008	Open Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4299131 · INJAI6 · 1 invoice(s)** Shipping bills › SB 4299131 of 15-Apr-2026 (INJAI6) - KE-26-27-003.pdf · added as 4299131150420261NJAI6SB2150420261105.pdf	KE/26-27/003	Open Save a copy Share Show in folder Correct Remove
27 Sep 26	**Shipping bill 4250672 · INMUN1 · 1 invoice(s)** Shipping bills › SB 4250672 of 20-Mar-2026 (INMUN1) - KE-25-26-066.pdf · added as 4250672200320261NMUN1SB2200320261105.pdf	KE/25-26/066	Open Save a copy Share Show in folder Correct Remove

Documents: each named for what it is, filed by kind, with Open, Save a copy, Share, Show in folder and Remove.

Every document posted, newest first, with a **Show** filter by kind: what was read (*Shipping bill 4569456 · INNSA1 · 1 invoice*), where it is kept (*Shipping bills › SB 4569456 of 08-Sep-2026 (INNSA1) - KE-26-27-021.pdf*), the name it came in with, *corrected by you* if it was, what the AI checker made of it if you have it, the invoices it was filed against, and **Open**, **Save a copy**, **Share**, **Show in folder**, **Correct** (the correcting window) and **Remove** (which deletes the kept copy, works the register out again, and is written into the history).

The AI checker

An add-on, for a second opinion on what was read. Once you get it (*Settings* > *AI checker*), a small AI model on your own computer reads each shipping bill, bill of lading, bank advice and invoice again on its own - those waiting under *Check what was read* and those already posted - and compares what it reads with what the app read, your corrections included.

- **Where it reads the same**, the document says *the AI reads it the same* - in *Check what was read* and in *Documents*.

- **Where it reads differently**, a document waiting to be checked shows both readings (*Amount: the app read EUR 2,050.00; the AI reads EUR 30,050.00*), and a posted one gets an open entry under **Read differently by the AI**, saying which fields. Open the original and see which is right, then: **Use the AI's reading** (kept as your corrections, in the history, undone like any other), **Correct it yourself**, or **The app read it right - take this off the list**.
- A document you correct, or read again, is checked again.

✓ It works only on your computer: nothing you add is sent anywhere. It starts after the app has been left alone for a minute, reads one document at a time, and never takes more than half the processor; with a graphics card a document takes a few seconds, on the processor alone longer.

✓ Nothing it reads goes into the register by itself; it only points at what to look at.

✓ With Tally Invoice Bridge on the same computer, one copy serves both: the checker uses the AI the bridge downloaded, and the bridge uses this one. Nothing is downloaded twice.

✓ A number it copies with its date after it (*KE/25-26/062-04/03/2026*) is compared without the date; a field it cannot read is left out, not counted against the app.

✗ It reads only PDFs and pictures - not spreadsheets, whose cells are read exactly already - and only the first two pages of each; lists (GSTR-1, IRM, eBRC, ICEGATE and EDPMS downloads) are not checked.

✗ It can be wrong too. Where the two readings differ, the original decides.

✗ It needs about 8 GB free to get and keeps about 4 GB. It is not part of the app's updates.

What Exports cannot do

✗ Log in to ICEGATE, the GST portal, DGFT or a bank, or fetch anything from them. ICEGATE has no interface for exporters; the app reads the files you download. It never stores portal passwords or gets past captchas.


✗ Generate eBRCs, or file anything.

✗ Read the GST portal's failed-invoice list, or an export ledger CSV; draw up a Rule 96B schedule; track RoDTEP (it is shown, not tracked); handle service exports (SOFTEX).

✗ Use foreign credits from a Bank reconciliation - export registers are separate from runs.

Settings

Settings (in the cover band) saves each change as you make it. Settings apply to every run and client - there is one set.

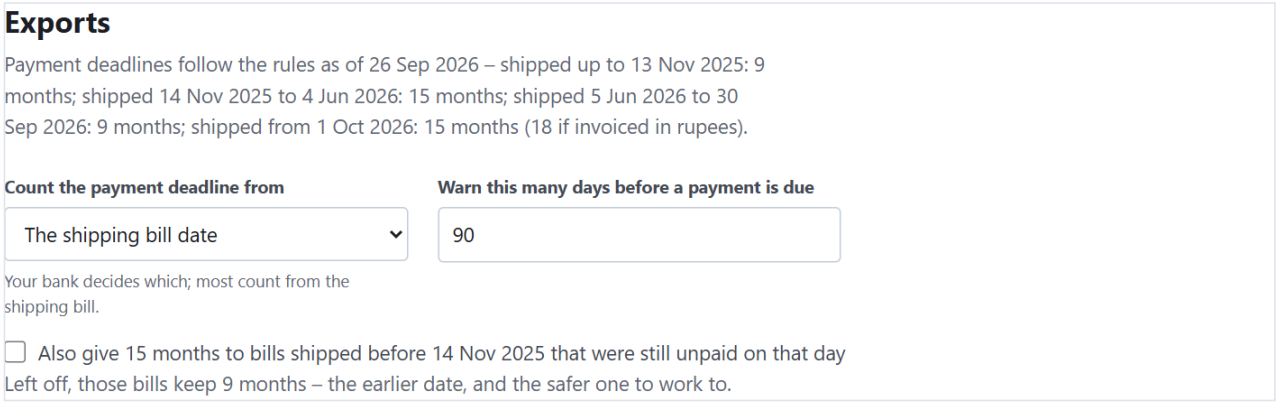

Settings, Exports: which date the payment deadline counts from, how early to warn, and the rules in force.

Your business

Setting	Default	What it changes
Business name	blank	Printed on reports and letters. Fills in *Business name* on a GST check (and wins over the name in the Tally file unless you clear it). Bank checks always take the business name from here
Your GSTIN	blank	Fills in the GST check (it sets your home state for the place-of-supply check); printed on reports; used by the GST sample if set
Your name	blank	Printed as preparer on the PDFs; signs the supplier letters, the balance confirmation letter and the export drafts
Address	blank	Printed on the export drafts

How closely entries must agree

Setting	Default	What it changes
GST: allow a difference of (₹)	2	The rounding allowed on amounts (the sample always uses 2)
GST: look this many days either side	45	The date window for *Probably the same bill* and *Entered in parts*
Bank: allow a difference of (₹)	1	The difference above which a pair is *Amount differs*, and the allowance on several-in-one groups
Bank: same transaction if within (days)	7	The date window for a match
Bank: timing difference up to (days)	45	How far apart a *Timing difference* can be
Party statements: allow a difference of (₹)	1	As for bank

Exports

Setting	Default	What it changes
Count the payment deadline from	The shipping bill date	Or the let export order date, or the shipped-on-board date on the bill of lading - your bank decides which
Warn this many days before a payment is due	90	When an unpaid bill counts as *due soon* (0 to 365)
Also give 15 months to bills shipped before 14 Nov 2025 that were still unpaid on that day	off	Left off, those bills keep 9 months - the earlier date, and the safer one to work to

The line above them shows the realisation rules the app is using, and the date they are as of.

AI checker

Setting	Default	What it changes
State	not on this computer	**Get the AI checker** downloads it (about 5 GB, once; you can go on working meanwhile, and a cut-off download carries on where it stopped) - or, when Tally Invoice Bridge has already downloaded the same AI, *Uses the AI that Tally Invoice Bridge downloaded*, with nothing to download; then how many documents it has checked, how many read the same and how many differently, and **Remove it**
Check documents in the background	on	Off: it stops checking; what it has read already stays with each document

See *Exports* > *The AI checker*.

The app

Setting	Default	What it changes
Version	-	The version you have, whether it is the newest and when that was last checked, **Check now** - and **Restart and update** when a newer version is ready (see *Updating*)
Check for updates when this computer is online	on	Off: the app makes no connection to the internet at all
Where your data is kept	beside the program	Shows the folder and its size; **Show the folder**; **Move it to another folder...** (see *Where your data is kept*)
Keep every check, so you can open it again and download its reports	on	Off: a check is shown once and not kept - no downloads, no kept files, no Match again. Export documents are always kept
Close the app	-	Closes the window and stops the program

✗ Some finer matching thresholds (how alike names must be, the score for a probable match, the percentage allowance, the size of several-in-one groups) have no place in Settings; they keep their defaults, listed in *Every number the app uses*.

✗ Settings cannot be kept per client.

Privacy and security

- ✓ **Nothing about your work leaves your computer.** The only thing the app ever sends over the internet is a request to its release page on GitHub for the number of the newest version - a little after it starts and every six hours while it is open, and only while **Check for updates when this computer is online** is ticked in Settings. When there is a newer version it downloads that version's installer from the same page. No runs, files, settings, names, GSTINs or figures go with either request. The one other download is the AI checker's, only when you press **Get the AI checker**: the Ollama runtime from Ollama's GitHub release page (checked against the fingerprint Ollama publishes) and the model from Ollama's model library - nothing of yours goes with it, and nothing at all is downloaded when Tally Invoice Bridge already has the same AI on this computer. The release page is private; the program carries a key that can read that page and nothing else. There are no uploads, no analytics, and no fonts or scripts fetched from elsewhere; the text-recognition models are part of the program.
- ✓ **Updates cannot be faked.** Each release carries a small file naming the version and the fingerprint (SHA-256) of its installer, signed with the publisher's private key, which never leaves the publisher's own computer. The app checks that signature with the public key built into it, then checks the downloaded installer against the fingerprint. A file with the wrong signature is ignored, a download that does not match is thrown away, and nothing is installed until you press **Restart and update**.
- ✓ **The AI checker works on your computer alone.** Its runtime listens on 127.0.0.1 only, on a port of its own, and dies with the app; the documents it reads never leave the computer. What it is asked to do is fixed in the program - copy a fixed set of fields - and nothing written on a document is taken as an instruction.
- ✓ **It listens only on your own computer** (address 127.0.0.1, port 8000 to 8011). Other computers and phones on your network cannot reach it.
- ✓ **It never logs in anywhere** and never stores a portal password.
- ✓ **Files are only passed on when you ask**: *Share* hands a file to Windows' share window, *Open it in your email* opens your mail program with the letter, *Show in folder* opens File Explorer, *Open* shows a kept file in your browser, and downloads go to your Downloads folder. What happens next is up to you and those programs.
- ✓ **The files behind Open, Save a copy, zip and Show in folder are found from the app's own records**, never from the address in a request, and kept file names are cleaned for Windows.
- ✓ **The released program is checked before it is built**: the build refuses to go ahead if any spreadsheet, PDF or database other than the made-up sample data is inside it, so no one's real books can ship with it.
- ✗ **There are no user accounts or passwords.** Anyone who can use your Windows account can open the app and see everything in it, and any program running on your computer could talk to it while it runs.
- ✗ **The data is not encrypted.** The database, the kept copies of your files and the log are ordinary files in the data folder. Protect them as you protect your Tally data: with your Windows password and your disk encryption (BitLocker), and by backing them up.
- ✗ With update checks on, GitHub (owned by Microsoft) sees that your computer asked for the release file, and when - its internet address, as for any web page. Untick the setting and the app makes no connection at all; you can still update by running a newer `Install.exe`.
- ✗ The program's built-in technical pages (a description of its internal interface) are not switched off; if you open them in a browser, that browser fetches their page style from the internet. They are never linked from the app.

Everything it can do

Gathered from every chapter, in one place.

Overall

- ✓ Run on your own Windows computer, in a window of its own, with no account, no administrator rights and no internet needed; update itself when online, from signed releases, when you press the button; install and uninstall with one file each way; keep your data in the folder you choose, and move it later from Settings.
- ✓ Keep every run, export register, decision and setting between sessions, with nothing to save by hand; reopen the run you were last working on.
- ✓ Keep every file you give it, named for what it is and filed by kind, and let you open, save, share, zip or find any of them in File Explorer.
- ✓ Explain every open entry in plain words: what it is, what was checked, the closest match and why it was not taken, what it means in rupees, and what to do.
- ✓ Let you tick entries off (done, being chased, not a problem), undo that, and link straight to an entry.
- ✓ Read Excel, CSV, text PDFs, scanned PDFs, photos and screenshots - scans offline, in about a second a page.

Reconciliation - GST

- ✓ Match your Tally purchase register with one or many GSTR-2B files in six passes: exact, amount differs, bill number differs, probably the same bill, entered in parts, and one-sided.
- ✓ Handle amendments, credit and debit notes, ISD and imports; leading zeros and separators in bill numbers; M/s and company endings in names.
- ✓ Check every bill for place of supply, reverse charge, portal-blocked credit, partial credit, impossible or mixed tax rates, IGST mixed with CGST/SGST, values that do not tie, duplicates, and Section 16(4) lapse.
- ✓ Work out the credit you can safely claim (each bill's credit taken off once, at the first deduction that applies), the credit waiting on bookings, purchases your suppliers have not filed, and the last date to claim; and, with your sales files, a GSTR-3B working set off against the credit allowed by law.
- ✓ Match your sales register with the GSTR-1 you filed.
- ✓ Produce a 17-to-27-sheet Excel workbook with a health score and supplier grades, a signed-off PDF working paper, CSV extracts, and a letter to every supplier with open bills; re-match with different settings without re-uploading.

Reconciliation - Bank

- ✓ Read statements from any bank in Excel, CSV, PDF, scan or photo; recognise the bank, account and IFSC; classify every line's channel; check the running balance row by row.
- ✓ Match by reference, by amount and date, as timing differences, as amounts that differ, and one bank line against several book entries.
- ✓ Produce a bank reconciliation statement that proves itself to the rupee, name unpresented cheques, uncredited deposits, charges, interest and direct debits, and flag stale cheques, duplicate payments, large cash and unexplained credits.

Reconciliation - a party's statement

- ✓ Read suppliers' and customers' statements in any format, including Tally's own quirks, one Amount column with a Dr/Cr column, two-sided layouts and interest statements; pick the right ledger from a workbook of many.
- ✓ Match by document number, amount and date, and interest and TDS as period totals; build a bridge that names every rupee between the two balances.
- ✓ Check an interest statement's arithmetic line by line; explain an interest difference; check a supplier's bills against what they filed in GSTR-2B.
- ✓ Draft a balance confirmation letter, ready to copy or email, and remember the supplier's contact.

Exports

- ✓ Keep one register per exporter from any mix of shipping bills, bills of lading, invoices, GSTR-1 (JSON or Excel), bank advices, DGFT IRM and eBRC lists, ICEGATE status, refund and drawback downloads, the bank's EDPMS statement and your own shipping bill register.
- ✓ Show, per invoice, the shipping bill, bill of lading, Table 6A line, payment, eBRC, IGST refund and drawback, with everything on file in the invoice's file and its papers in one zip.
- ✓ Work out every payment deadline under the right one of four FEMA regimes, from the date your bank uses, honouring the bank's extensions.
- ✓ Count payments only on evidence, suggest the rest and wait for your click; ask which invoices a newly added bank advice pays, and split one payment over as many invoices as you choose; spot a payment that covers several of one buyer's invoices at once, and an advance booked for goods already shipped; prepare the DGFT bulk eBRC sheet with every row checked.
- ✓ Take your own yes or no on whether an invoice is in GSTR-1 and whether its IGST refund and drawback came back, where no document says or one is wrong.
- ✓ Show what was read from every document you add - its numbers, dates, money and where it will be filed - and keep it out of the register until you post it.
- ✓ Correct anything read from any document, before or after it is posted, field by field and row by row, and turn a misread or unrecognised file into the kind of document it is.
- ✓ Read a document again with a newer version's reader, keeping your corrections that still differ.
- ✓ With the AI checker (an add-on), have a local AI model read every document again in the background and point out where its reading differs from the app's - never changing anything until you say so.
- ✓ Offer the ICEGATE, DGFT and bank lists you save to your Downloads folder, and give each shipping bill to look up a link to ICEGATE's enquiry with its port, number and date ready to copy.
- ✓ Keep a history of everything done to a register - each document added, corrected (before and after), posted and removed, each payment placed, each answer and decision - with when and who, on the page and in the Excel download.
- ✓ Catch Table 6A mismatches (SB001, SB003, SB005, IGST, WPAY/LUT, missing, duplicated), missing papers, refunds and drawback not received with their ICEGATE codes, drawback waiting on proof of payment, and EDPMS disagreements.
- ✓ Draft the SB005 pack per port, the Table 9A worksheet, the SB003 undertaking, the EDPMS declaration, the extension request and the ICEGATE look-up list; give back the register in your own sheet's layout.

Everything it cannot do

The limits from every chapter in one place, overall first.

Overall

- ✗ File anything, or connect to the GST portal, ICEGATE, DGFT or any bank. It reads the files you download.
- ✗ Work on a Mac, a phone, or more than one computer; share data between computers or people; or keep separate logins.
- ✗ Back up your data automatically; restore it from a button; or encrypt it.
- ✗ Update itself from anywhere but its GitHub release page, install an update without restarting, or update versions before 2.2.0 (install 2.2.0 by hand once).
- ✗ Stop you running an older `Install.exe` over a newer version (updates it fetches itself are always newer).
- ✗ Show the log's location on screen.
- ✗ Stop when you close the browser tab, when it opens in the browser for want of WebView2 - use Settings > Close the app.
- ✗ Replace a professional's judgement: letters and worksheets are drafts, suggestions need your confirmation, and anything read from a scan must be spot-checked.

Reading files

- ✗ GST files other than `.xlsx`; old `.xls` anywhere; password-protected PDFs; more than 40 pages of a PDF (the rest are ignored silently); more than 20,000 rows of a sheet (bank, party, exports); more than 60 columns of a GSTR-2B.
- ✗ Handwriting, sideways or upside-down photos, scripts other than English letters and digits, several photos combined into one statement, pages after the first of a multi-page TIFF.
- ✗ A column map for files without recognisable headings; a preview of what was read before it is used.

Decisions and reports

- ✗ Carry decisions to a new, separate run; take a note with a decision; tick many at once.
- ✗ Leave ticked entries out of the Excel, PDF, CSV, letters, drafts or summary figures.
- ✗ Show on screen what is only in the downloads: the GST credit and GSTR-3B workings, checklist, data findings, ageing, rates, trend and supplier grades; the bank findings and channel tables; the party findings, ageing and GSTR-2B results.
- ✗ Open older checks of the same kind in a run (only the newest shows); rename, archive or pin runs; compare two checks.

GST

- ✗ Use Tally's GSTIN to identify a supplier (names are used); filter a Day Book to purchases; read Tally narrations, tax columns or "Dr/Cr" text.
- ✗ Decide Section 17(5) blocked credit; recognise tax rates above 28.5% as genuine.
- ✗ Know whether reverse-charge tax has been paid (that credit is kept out of *safe to claim* either way); take credit from before the year out of the working; set off GSTR-3B against only the credit that is safe to claim (it uses the credit allowed by law).
- ✗ Match several bills booked as one voucher; stop a same-number, same-amount pair from different suppliers being matched (it is only noted in the downloads); cap the difference on a same-number pair.
- ✗ Match sales other than by exact invoice number; match B2CS summaries; export sales in CSV.

Bank

- ✗ Pair two lines one-to-one whose amounts differ at all (the tolerance applies to the *amount differs* test and to groups); match several bank lines to one book entry.
- ✗ Read "Dr"/"Cr" or a trailing minus on amounts; reverse a newest-first statement; read a bank book with one Amount column or with dates left blank on repeated lines.
- ✗ Catch a misread figure when the statement has no balance column.
- ✗ Re-match without adding the files again; pair lines by hand.

A party's statement

- ✗ Tell which way an amount went when one Amount column has no Dr/Cr column, voucher type or minus sign (it is taken as a debit); find document numbers in files that have no number column.
- ✗ Prove that their statement was read correctly - the bridge always adds up; check customers against GSTR-1.
- ✗ Keep reading notes after the first showing; put the confirmation letter in a download.

Exports

- ✗ Generate eBRCs; read the GST failed-invoice list or an export ledger CSV; draw up a Rule 96B schedule; track RoDTEP; handle service exports.
- ✗ Match payments in a currency other than the invoice's, or set more against an invoice than its value.
- ✗ Record the date or amount of a refund or drawback you mark received by hand - only yes or no.
- ✗ Add rows to your own shipping bill register from the app (correct or remove them, yes; add them in the workbook), or turn a list into another kind of document.
- ✗ Keep a history of anything done before the history was added, or keep a register's history after the register is deleted.
- ✗ Join a Table 6A line whose invoice number and shipping bill number are both wrong; treat a leading-zero difference as a typing slip.
- ✗ Name ports other than Nhava Sheva, Mundra, Mumbai and Chennai in the drafts; ask for other than 180 days in the extension request.
- ✗ Have the AI checker read spreadsheets, lists or pages after the second, run it on another computer, or let it change anything by itself.
- ✗ Keep up with a rule change by itself - the realisation rules are as of 26 September 2026, in a file that has to be edited when they change.

When something goes wrong

Messages and what to do

You see	What it means	What to do
That file cannot be read here	The file's type is not accepted in that box	GST boxes take `.xlsx` only; bank and party boxes take Excel, CSV, PDF or a picture; Exports takes PDF, pictures, Excel, CSV and the GSTR-1 JSON
That file is not a readable .xlsx workbook…	Not a real .xlsx (an old .xls, a CSV renamed, a damaged download)	Download it again from the portal, or export again from Tally as Excel
Could not find the column headers in this Tally export…	No heading row with Particulars, Vch No. or Vch Type in the first 30 rows	Export the Purchase Register with Date, Particulars, Vch Type, Vch No., Debit and Credit
No GSTR-2B rows could be read…	No recognisable B2B (or other) sheet, or no GSTIN column	Use the GSTR-2B Excel from the portal, unedited
Could not find the columns of that bank statement…	No heading with a date, a narration and amounts	Download the statement as Excel or CSV from net banking if you can; for a PDF, try *Read the statement as a scan*
Could not find the columns of that statement…	The party file has no heading with date, particulars, and debit and credit (or one amount with a Dr/Cr column)	Ask for the statement as Excel, or export your ledger with Debit and Credit columns
The running balance does not tie on N row(s)…	Balances on the statement do not follow line to line: edited, or a figure misread	Look at the flagged rows against the original; re-download the statement if it came from net banking
₹X of the difference cannot be explained	The working does not add up	A figure was probably read wrongly - check the scan, or use an Excel copy
That is an image, so it has to be read by recognition, and OCR is not installed	Only when running from source without the recognition package	The installed program always has it; from source, install the requirements
That is an old .xls file…	An Excel 97-2003 file	Open it in Excel and Save As .xlsx
Ports 8000 to 8011 are all in use	Other programs are using all twelve (a copy of the app already open is brought to the front instead)	Close what is using those ports and start the app again
Could not check - no internet connection (Settings)	The computer was offline, or GitHub could not be reached	Nothing to do: it looks again at the next check. *Check now* tries straight away
Could not check. The release file failed its signature check…	The file on the release page was not signed with the publisher's key	Nothing was downloaded or installed. Tell whoever supplies the app
Could not check. The download did not match the release's fingerprint…	The installer fetched was not the one the release describes (a broken download, or tampering)	It was thrown away; the next check fetches it again
Could not check. The key to the release page has expired or been withdrawn…	The read key built into this copy no longer works	Install the newest version by hand once; it carries a new key
Your data is kept in … and that folder cannot be reached	The chosen data folder is on a drive that is not connected, or was deleted	Connect the drive and start again, or run Install.exe again to choose another folder
That run no longer exists, so nothing was added to it	The run was deleted in another tab	Start the check as a new run

You see	What it means	What to do
This check was not saved… nothing to download	*Keep every check* is off in Settings	Switch it on and check the files again
Nothing outstanding, so there is no follow-up pack to build	No supplier has open bills	-
No payment is waiting for an eBRC… and other Exports refusals	There is nothing to put in that draft	-
… is not a date, *… is not a number*, *… has no invoice number* (correcting a document)	A box in the correcting window holds something that cannot be right	Put that box right, or blank it, and save again - nothing was saved until every box passes
A new row cannot be added here	Rows were added to your own register in the app	Add the row to the workbook itself and add the workbook again; its rows can be corrected or removed here
A document you added is not in the register	It is waiting under *Check what was read* at the top of the register	Check it and press *Post it* (or *Post all*)

Common questions

It is slow the first time I add a scan. From 2.1.2 the recognition engine is loaded in the background a few seconds after start; a very early scan may still wait for it. After that a scanned page takes about a second or a second and a half. Large scans take proportionately longer - a 40-page statement takes about a minute.

The figures from my scan look wrong. Scans are read, not trusted: check the flagged rows, the running-balance note and the residual. A statement downloaded as Excel or CSV from net banking is always better than a scan.

The app opened in my browser, not in a window of its own. WebView2 is missing or would not start. Install the *Microsoft Edge WebView2 Runtime* from Microsoft's website and open the app again. Until then it works in the browser, where closing the tab does not stop it - use Settings > Close the app.

I pressed Restart and update and the app did not come back. Open it from the shortcut. If the version in Settings is still the old one, the update did not finish; the installer it fetched is in `%LOCALAPPDATA%\Assurance Console\updates` - run it, or the newest `Install.exe` from the release page.

The AI checker says a document reads differently. Open the original and look at the field it names. If the AI is right, press *Use the AI's reading*; if the app is right, *The app read it right - take this off the list*. Either way the register goes on counting what the app read until you choose.

Getting the AI checker stopped part-way. Press *Try again* in Settings > AI checker: it carries on where it stopped. It needs about 8 GB free on the drive of your Windows user folder.

I have Tally Invoice Bridge too. Does the AI come down twice? No. Whichever app gets it first keeps the one copy and the other uses it: *Settings* > *AI checker* then says *Uses the AI that Tally Invoice Bridge downloaded*. If both already have a copy, the checker says so, and removing this one frees about 4 GB.

Where are my reports? In your Downloads folder, named after the business, the kind of report and the date and time.

Where is my data? Settings > The app > Where your data is kept. *Show the folder* opens it.

How do I move my data to another drive? Settings > The app > *Move it to another folder…* - the app copies everything, checks the copy and carries on from there. The installer and uninstaller follow it.

How do I give someone a file? Open the check or register, find the file under *Downloads and files* (or *Documents* in Exports), and use *Save a copy*, *Share*, or *Show in folder* to drag it into an email. An invoice's papers go together with *Save them as one zip*.

Can two people use it? Not at the same time on different computers. It is one person, one computer.

Something failed that I cannot explain. Unexpected errors are written, with details, to `log.txt` in the data folder. Send that file to whoever supports you. (Errors the app turns into a message for you are not written there.)

Can I check the program itself? From the source code, `python -m app.backend.selftest` runs seventy-nine checks of the matching, the credit working, the readers, the explanations, the export rules and the update signature; `python packaging/test_update.py` checks the installer's update, rollback, reopening and data-folder handling.

Every number the app uses

What	Value	Where it matters
GST: rounding allowed	₹2 (Settings)	Matched, bill number differs, entered in parts
GST: date window	45 days (Settings)	Probably the same bill, entered in parts
GST: names alike enough	50% (40% for a same-number pair, 35% for a probable match)	Bill number differs, amount differs
GST: probable match	amount within 0.1% or ₹2, score at least 0.72	Probably the same bill
GST: entered in parts	up to 3 vouchers, from the 14 largest candidates	Entered in parts
GST: rounding-only difference	up to ₹10	Amount differs
GST: dates far apart	more than 31 days	A note on matched pairs
GST: Section 16(4) warning	60 days or fewer before 30 November after the year	Red entries, the deadline figure
GST: value does not tie	more than ₹2 or 0.5%	A note on the bill
GST: tax slabs	0, 0.1, 0.25, 1, 1.5, 3, 5, 6, 7.5, 12, 18, 28% (0.3 points either way)	Mixed or impossible rate
Bank: difference allowed	₹1 (Settings)	Amount differs, several-in-one
Bank: same transaction	7 days (Settings)	Matched
Bank: timing difference	up to 45 days (Settings)	Timing difference
Bank: amount differs	up to ₹500 or 5%	Amount differs
Bank: several in one	2 to 4 entries, from 14 candidates	Several entries in one
Bank: names alike	62 out of 100	Amount differs, notes
Bank: stale cheque	over 90 days	Stale cheques
Bank: large cash	₹2,00,000	Large cash movements
Bank: running balance	₹1 a row	Running-balance check
Bank and party: working adds up	within ₹0.50	"It adds up"
Party: difference allowed	₹1 (Settings)	Amounts differ, interest and TDS totals
Party: same document	10 days	Agrees
Party: timing	11 to 60 days	Same amount, different dates
Party: dispute	up to 12%	Amounts differ
Party: sheet name match	75% alike	Choosing your ledger's sheet
Party: long open	over 180 days	Red entries
Exports: due soon	90 days (Settings)	Payment due soon
Exports: bank charges	up to 1%, at most 150 currency units	Paid, short by charges
Exports: the buyer's own invoices	remitter's name 60% alike	Which invoices a payment is for
Exports: no shipping bill	15 days after the invoice	No shipping bill

What	Value	Where it matters
Exports: no bill of lading	10 days after the shipping bill	No bill of lading
Exports: refund due back	45 days (drawback 30)	*Not due back yet*
Exports: refund short	more than ₹100	IGST short
Exports: drawback serious	after 180 days	Drawback not received
Exports: SB005 port fee	₹1,000 a shipping bill	SB005 pack
Exports: declaration limit	₹10,00,000, from 1 October 2026	EDPMS declaration
Exports: extension asked	180 days	Extension request
Exports: over a year overdue	365 days	Advance or letter of credit needed
Reading: PDF pages	40	All PDFs
Reading: text page	90 characters	Text or recognition
Reading: scan resolution	200 dpi	Recognition
Reading: rows per sheet	20,000 (bank, party, exports)	Spreadsheets
Reading: GSTR-2B columns	60	GSTR-2B
Reading: small pictures enlarged	to 1,500 pixels, at most 3 times	Screenshots
Reading: large pictures	words found on a copy of at most 4,000 pixels; pages drawn at most 5,000 pixels	Recognition
Reading: recognition threads	2 to 6	Speed
Reading: low-confidence word	below 0.62	Notes
Lists: open entries shown	150 at a time	Needs a look
Lists: all entries	100 a page	All entries
Lists: runs	8 on the start page, 10 in the run menu, 200 in all	Runs
App address	127.0.0.1, port 8000 to 8011	Starting
Update checks	20 seconds after start, then every 6 hours (installed app, setting on)	Updating
Update downloads	up to 1 GB; 4 seconds for each of GitHub's addresses to connect, then 20 seconds without data before giving up	Updating

Glossary

Word	Meaning
AD code	The code of the bank branch that handles your export proceeds
BRS	Bank reconciliation statement: the working from your book balance to the bank's
Bill of lading (BL) / airway bill	The shipping line's or airline's receipt for the goods; its shipped-on-board date is the day they left
Bridge	The working from your ledger balance to a party's
Drawback	A refund of customs duty on the inputs of exported goods, claimed on the shipping bill
eBRC	Electronic bank realisation certificate, generated on the DGFT portal: proof that an export was paid for
EDPMS	The RBI's Export Data Processing and Monitoring System, in which your bank tracks every shipping bill until it is paid
EGM	Export general manifest, filed by the shipping line; without it the IGST refund does not validate (SB002)
FEMA	The Foreign Exchange Management Act, whose regulations set the time allowed to bring export proceeds in
FIRA / FIRC	The bank's advice or certificate of an inward remittance
GSTR-1	The return of your sales. Table 6A holds exports; Table 9A amends earlier returns
GSTR-2B	The statement, on the GST portal, of the bills your suppliers reported - the basis of your input tax credit
GSTR-3B	The monthly summary return in which tax is paid and credit taken
ICEGATE	Customs' portal, where shipping bills, refund and drawback status are shown
IEC	Importer-exporter code
IGST refund	The refund of IGST paid on goods exported with payment of tax (WPAY), paid by customs once the shipping bill matches GSTR-1
IRM	Inward remittance message: a bank's record of a payment from abroad, listed on the DGFT portal
ITC	Input tax credit
LEO	Let export order: customs' permission for the goods to leave
LUT	Letter of undertaking: exporting without paying IGST (WOPAY)
OCR / recognition	Reading text from a picture of a page
Place of supply	The state where a supply is treated as made; decides whether CGST/SGST or IGST applies
Realisation	Receiving the export proceeds
Reverse charge (RCM)	Tax the buyer pays instead of the supplier, then claims as credit
RoDTEP	Remission of duties and taxes on exported products, credited as an e-scrip
Rule 96A / 96B	GST rules: an export under LUT not paid for in time becomes liable to IGST (96A); a refund taken on an export not paid for in time must be repaid (96B)

Word	Meaning
Section 16(4)	The time limit for claiming input tax credit: 30 November after the end of the financial year
Section 17(5)	Credits the law blocks whatever the bill says (motor vehicles, food, personal use…)
Shipping bill (SB)	The customs declaration for exported goods
UTR	Unique transaction reference of an NEFT or RTGS payment
WebView2	The browser engine built into Windows that draws the app's own window
WPAY / WOPAY	Export with payment of IGST / without payment of IGST (under LUT)